



City Research Online

City St George's, University of London

Citation: Zhang, Y., Sun, Z., van Zuijlen, A. & van Bussel, G. (2017). Numerical simulation of transitional flow on a wind turbine airfoil with RANS-based transition model. *Journal of Turbulence*, 18(9), pp. 879-898. doi: 10.1080/14685248.2017.1334908

This is the accepted version of the paper.

This version of the publication may differ from the final published version. To cite this item please consult the publisher's version.

Permanent repository link: <https://city-ref-test.eprints-hosting.org/id/eprint/18490/>

Link to published version: <https://doi.org/10.1080/14685248.2017.1334908>

Copyright and Reuse: Copyright and Moral Rights remain with the author(s) and/or copyright holders. Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge, unless otherwise indicated, provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way. For full details of reuse please refer to [City Research Online policy](#).

Numerical simulation of transitional flow on a wind turbine airfoil with RANS-based transition model

Ye Zhang^a, Zhengzhong Sun^{b,*}, Alexander van Zuijlen^a, Gerard van Bussel^a

^a*DUWIND, Faculty of Aerospace Engineering, TUDelft, Kluyverweg 1, 2629HS, Delft, The Netherlands*

^b*City University of London, Northampton Square, London, EC1V 0HB, UK*

Abstract

This paper presents a numerical investigation of transitional flow on the wind turbine airfoil DU91-W2-250 with chord-based Reynolds number $Re_c = 1.0 \times 10^6$. The RANS-based transition model using laminar kinetic energy concept, namely the $k - k_L - \omega$ model, is employed to resolve the boundary layer transition. Some ambiguities for this model are discussed and it is further implemented into OpenFOAM-2.1.1. The $k - k_L - \omega$ model is first validated through the chosen wind turbine airfoil at the angle of attack (AoA) of 6.24° against wind tunnel measurement, where lift and drag coefficients, surface pressure distribution and transition location are compared. In order to reveal the transitional flow on the airfoil, the mean boundary layer profiles in three zones, namely the laminar, transitional and fully turbulent regimes, are investigated. Observation of flow at the transition location identifies the laminar separation bubble. The AoA effect on boundary layer transition over wind turbine airfoil is also studied. Increasing the AoA from -3° to 10° , the laminar separation bubble moves upstream and reduces in size, which is in close agreement with wind tunnel measurement.

Keywords: Boundary layer transition, Laminar separation bubble, Wind turbine aerodynamics, CFD, RANS modeling, Laminar kinetic energy

1. Introduction

At present, wind turbines are being up-scaled towards 10-20 MW in off-shore wind farms. The power increase gives rise to larger rotor blades, which are apparently more costly and more flexible. Therefore, detailed flow investigations over such large blades are needed to ensure operations. One

*Corresponding author. *Preprint submitted to Journal of Turbulence*

Email address: Zhengzhong.Sun@city.ac.uk (Zhengzhong Sun)

April 20, 2017

particular phenomenon that plays a key role in blade performance is the laminar-turbulence transition (LTT). The LTT is not only crucial in aerodynamic characteristics of wind turbine airfoil, but also in forming laminar separation bubble (LSB). The LSB is very sensitive to flow perturbation and it may burst during the blade rotation. Consequently, it could cause the double-stall phenomenon, which decreases the wind turbine performance significantly [1]. As a result, accurate LTT prediction is of great importance for the aerodynamic design and analysis of wind turbine blade, and it is aimed as the first objective in the present work.

Benefiting from the rapid development of flow simulation methodology, transition has been extensively investigated by Computational Fluid Dynamics (CFD) methods. The Direct Numerical Simulation (DNS) and the Large Eddy Simulation (LES) have delivered promising results in transition simulations [2][3]. However, the expensive computational hours due to high grid resolution and unsteady simulation are still deterring their widespread application. On the other hand, the Reynolds Averaged Navier-Stokes (RANS)-based turbulent flow modeling is still the workhorse in the aerodynamic related simulations, as it is able to provide reasonably good results for attached flow and flow with minor separation under small or moderate requirements of computation resources. Therefore, it would be very useful to accurately predict transitional flow using RANS models. One of the most widely adopted approaches [4] for transition prediction in general-purpose CFD methods is the concept of intermittency, which is used to blend together laminar and turbulent flow regimes. The transport equation of the intermittency factor γ is numerically solved to predict transition. The main drawback of this approach is that it needs non-local information, for example the integral thickness of the boundary layer and the state of flow beyond boundary layer [5]. The intermittency concept in transition prediction has been further improved by Menter et al [6] in order to eliminate the non-local information. An additional transport equation of the transition onset Reynolds number $Re_{\theta t}$, a function of the boundary layer momentum thickness, is formulated. This model shows very promising prediction for 2D and 3D configurations, but the empirical correlations used in this model are proprietary [7]. A complete review on RANS-based transition modeling can be found in several articles [5][8][9]. The present introduction does not aim to provide a thorough review of all the relevant methods for transition simulation. Instead, emphasis is placed on the recently proposed RANS-based transition model using the laminar kinetic energy (k_L) concept, namely the $k - k_L - \omega$ transition model, which

enables transition modeling without any empirical input or pre-knowledge of the flow.

The concept of laminar kinetic energy in boundary layer transition was originally proposed by Mayle[10] to address the transition-induced aerodynamic and heat transfer problems in gas turbine engines. But, the original model containing k_L is not a single-point model and requires pre-knowledge of the flow field. The true single-point transition model using laminar kinetic energy was actually proposed later by Walters & Leylek [11], and it contains three transport equations for turbulent kinetic energy, laminar kinetic energy (k_L) and turbulent dissipation (ϵ), namely the $k - k_L - \epsilon$ transition model. The equation of turbulent dissipation was shortly replaced by that of specific dissipation rate (ω) by Walters & Leylek [12] and becomes the $k - k_L - \omega$ transition model. The $k - k_L - \omega$ model was later improved by Walters & Cokljat [13] in order to include shear-sheltering concept as transition initiation. The Walters-Cokljat $k - k_L - \omega$ model receives attention quickly and was validated with transitional flat plate test cases by Fürst [14], who states that there are some errors or probable typos for the $k - k_L - \omega$ model in the original paper [13].

The Walters-Cokljat $k - k_L - \omega$ model has been evaluated through several types of flow. In the flat plate transition cases, comparison was carried out against the ERCOFTAC T3 database [13][14][15], where several free-stream turbulence levels and pressure gradients are concerned. Since the model was originally proposed to address transition-induced heat transfer problem, transition in cascade was also validated in gas turbine applications [11][13][16][17][18]. Transition on the Aerospatiale airfoil is the third flow type for validation. Laminar separation bubble was claimed to be present at the transition location [19], however, no detailed analysis of transition process and the laminar separation bubble were provided. Therefore, the second objective of the present work is to perform detailed analysis of the transitional flow over the wind turbine airfoil.

Different from airfoils in gas turbine and aeronautical applications, wind turbine dedicated airfoils have distinctive features, such as much larger thickness in the inboard part of the blade. However, wind turbine airfoils have not been extensively simulated through this transition model. The transition cases that are publicly available are summarized in Table 1, where the free stream turbulence levels and the flow Reynolds numbers are also included. Figure 1 illustrates the range of turbulent intensity and Reynolds number for all the listed simulations. In the present paper, the investigation of transi-

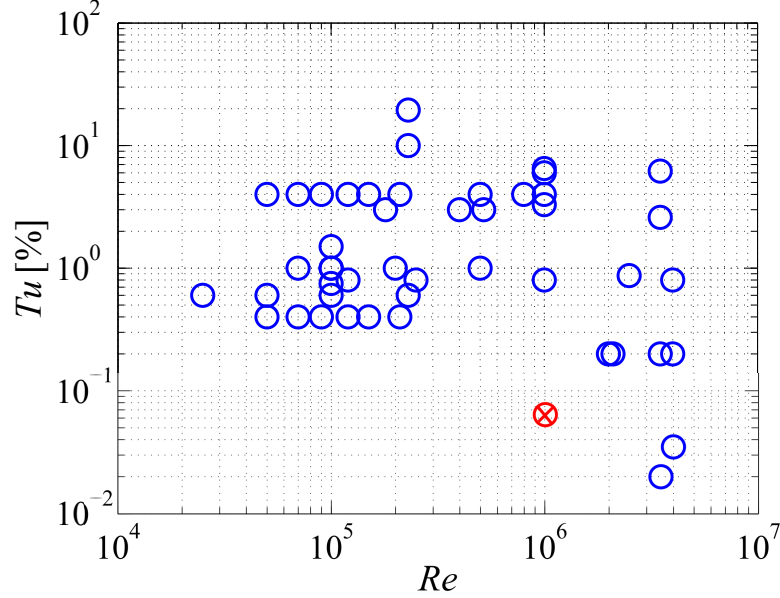


Figure 1: Turbulence intensity and Re number in the summarized transition simulations using $k - k_L - \omega$ model

107 tional flow over wind turbine airfoil under the condition of $Re_c = 1.0 \times 10^6$
108 and $Tu = 0.06\%$ extends the current knowledge in this area.

109 To summarize, the present work envisages to carry out transition simu-
110 lation using the $k - k_L - \omega$ model for the DU91-W2-250 wind turbine airfoil
111 with chord based Reynolds number of 1.0×10^6 , and to investigate the lam-
112 inar separation bubble on airfoil surface and its response for different angles
113 of attack. The DU91-W2-250 airfoil is chosen because an extensive wind
114 tunnel measurement database is available, allowing comparison of surface
115 pressure distribution, coefficients of lift and drag and the transition loca-
116 tion. The open-source CFD package OpenFOAM is used as flow solver. The
117 paper is organized as following: the $k - k_L - \omega$ transition model is first
118 briefly introduced, followed by the numerical aspects including flow domain
119 discretization and grid convergence study. In the results section, the airfoil
120 model is validated at AoA of 6.24° . The AoA is afterwards varied in the
121 range of $-3^\circ \sim 10^\circ$ so as to reveal the change of laminar separation bub-
122 ble. Conclusions are finally drawn from the observations and analysis of the
123 resolved transition flow.

Table 1: Summary of boundary layer transition cases with $k - k_L - \omega$ model addressed in the literature

Transition cases		Tu	Re
Walters&Leylek (2004)[11]	ZPG flat plate	0.02%	3,500,000
		0.2%	3,500,000
		2.6%	2,000,000
		6.2%	2,000,000
	Turbine cascade	0.6%	230,000
		10%	230,000
		19.5%	230,000
Walters&Leylek (2005)[12]	Highly loaded compressor-like flat plate	1.2%	
		6.4%	
Walters&Cokljat (2008)[13]	ZPG flat plate ERCOFTAC T3A-	0.87%	2,500,000
		3.3%	1,000,000
		6.5%	1,000,000
	ZPG flat plate ERCOFTAC T3C2	3.0%	520,000
		3.0%	400,000
		3.0%	180,000
		4.0%	800,000
		10%	23,000
	VPI cascade	19.5%	23,000
	VKI cascade	0.8%	1,000,000
		4.0%	1,000,000
		6.0%	1,000,000
		1.0%	500,000
		4.0%	500,000
	A-airfoil $AoA = 13.3^\circ$	0.2%	2,000,000
	S809 airfoil 0-20 degree	0.2%	2,000,000
Sanders et al. (2011)[16][17]	Lightly loaded turbine blade	0.75%	100,000
		1%	100,000
		1.5%	100,000
	Highly loaded turbine blade	1%	100,000
		0.6%	25,000
		0.6%	50,000
		0.6%	100,000
Clare Turner (2012)[15]	ZPG flat plate		
	Valeo-CD airfoil	-*	160,000
Furst (2013)[14]	ZPG flat plate ERCOFTAC T3A-	0.91%	3,000,000
		3.3%	3,000,000
		9.43%	3,000,000
		3.5%	2,000,000
		0.4%	50,000
Pacciani et al. (2011)[18]	T106C low speed		70,000
			90,000
			120,000
			150,000
			210,000
		4%	50,000
	T106C low speed		70,000
			90,000
			120,000
			150,000
			210,000
		0.8%	1.2×10^5
	T106C high speed		2.5×10^5
	T108 high speed	1%	0.7×10^5
			2.0×10^5
Medina& Early (2014)[20]	Flat Plate	0.035%	4×10^6
		0.8%	4×10^6
		0.2%	4×10^6
Accordi & de Lemos (2015)[19]	A-airfoil	0.2%	2.1×10^6

2. Methodology

2.1. Laminar kinetic energy and effective turbulent length scale

In the framework of $k - k_L - \omega$ transition model, the streamwise velocity fluctuation component u' accounts for nearly entire fluctuations of kinetic energy in the laminar region. It is thus named the laminar kinetic energy k_L by Mayle and Schulz[10]. The growth of k_L is explained through the “splat mechanism” by Volino[21], in which the negative wall-normal fluctuation component v' in free stream eddies entrains high momentum fluid from the outer region closer to the wall and this momentum transfer results in the streamwise fluctuation component u' . The “splat mechanism” illustrated by Walters & Leylek [12] is shown in Figure 3. The turbulent energy spectrum is divided into large scale eddies and small scale ones. The former initiates “splat” and gives rise to laminar kinetic energy, whereas the latter generates typical turbulence. In order to cut off the eddy size in the $k - k_L - \omega$ transition model, an effective turbulent length scale λ_{eff} is used.

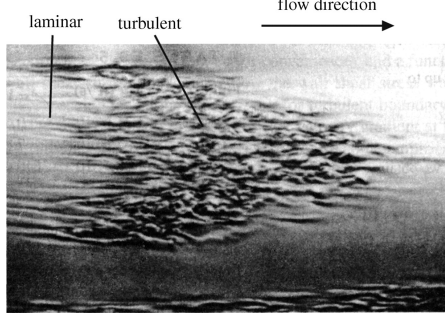


Figure 2: Laminar to turbulence transition over flat plate[22].

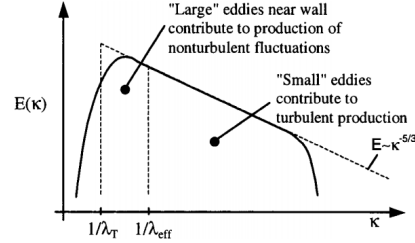


Figure 3: The “splat mechanism” for production of laminar kinetic energy[12].

2.2. The $k - k_L - \omega$ Transition Model

The present $k - k_L - \omega$ transition model is based on the low- Re $k - \omega$ shear stress transport (SST) eddy-viscosity model. Different from the other RANS-based transition models, such as $\gamma - Re_\theta - SST$, the advantage of the present model is the elimination of intermittency factor, which is a semi-empirical parameter that bridges the pre-transitional and turbulent boundary layer and enforces transition onset[11]. The $k - k_L - \omega$ model is a three-equation model,

147 the transport equation of k_L is added to model the low frequency velocity
 148 fluctuations. The transport equations for the turbulent kinetic energy k_T , the
 149 laminar kinetic energy k_L and the specific dissipation rate ω in incompressible
 150 form are represented below:

$$\begin{aligned} \frac{Dk_T}{Dt} = & \underbrace{P_{k_T}}_{\text{production}} + \underbrace{R_{BP} + R_{NAT}}_{\text{bypass and natural transition}} - \underbrace{\omega k_T}_{\text{destruction}} - \underbrace{D_T}_{\text{anisotropic dissipation}} \\ & + \underbrace{\frac{\partial}{\partial x_j} \left[\left(\nu + \frac{\alpha_T}{\sigma_k} \right) \frac{\partial k_T}{\partial x_j} \right]}_{\text{diffusion}} \end{aligned} \quad (1)$$

$$\begin{aligned} \frac{Dk_L}{Dt} = & \underbrace{P_{k_L}}_{\text{production}} - \underbrace{R_{BP} - R_{NAT}}_{\text{bypass and natural transition}} - \underbrace{D_L}_{\text{anisotropic dissipation}} + \underbrace{\frac{\partial}{\partial x_j} \left(\nu \frac{\partial k_L}{\partial x_j} \right)}_{\text{diffusion}} \end{aligned} \quad (2)$$

$$\begin{aligned} \frac{D\omega}{Dt} = & \underbrace{C_{\omega 1} \frac{\omega}{k_T} P_{k_T}}_{\text{production}} + \underbrace{\left(\frac{C_{\omega R}}{f_W} - 1 \right) \frac{\omega}{k_T} (R_{BP} + R_{NAT})}_{\text{bypass and natural transition}} - \underbrace{C_{\omega 2} f_W^2 \omega^2}_{\text{destruction}} \\ & + \underbrace{C_{\omega 3} f_{\omega} \alpha_T f_W^2 \frac{\sqrt{k_T}}{d^3}}_{\text{boundary layer wake correction}} + \underbrace{\frac{\partial}{\partial x_j} \left[\left(\nu + \frac{\alpha_T}{\sigma_{\omega}} \right) \frac{\partial \omega}{\partial x_j} \right]}_{\text{diffusion}} \end{aligned} \quad (3)$$

151 Note that the turbulent kinetic energy k_T is produced by the small-scale
 152 eddy and can be modeled through the main strain as $P_{k_T} = \nu_{T,s} S^2$, whereas
 153 the laminar kinetic energy k_L is produced by $P_{k_L} = \nu_{T,l} S^2$, which is assumed
 154 to be generated by large-scale near-wall fluctuations [11]. The small-scale
 155 eddy viscosity $\nu_{T,s}$ and the large-scale turbulence viscosity $\nu_{T,l}$ are defined
 156 as:

$$\nu_{T,s} = f_{\nu} f_{INT} C_{\mu} \sqrt{k_{T,s}} \lambda_{eff} \quad (4)$$

$$\nu_{T,l} = \min \left\{ f_{\tau,l} C_{11} \left(\frac{\Omega \lambda_{eff}^2}{\nu} \right) \sqrt{k_{T,l}} \lambda_{eff} + \beta_{TS} C_{12} Re_{\Omega} d^2 \Omega, \frac{0.5 * (k_L + k_{T,l})}{S} \right\} \quad (5)$$

In Equation 4, the effective small-scale turbulence is calculated by

$$k_{T,s} = f_{SS} f_W k_T \quad (6)$$

where f_W is the damping function which relates the effective turbulent length scale $\lambda_{eff} = \min(C_\lambda d, \lambda_T)$ and turbulent length scale $\lambda_T = \frac{\sqrt{k_T}}{\omega}$.

$$f_W = \left(\frac{\lambda_{eff}}{\lambda_T} \right)^{\frac{2}{3}} \quad (7)$$

Note that the damping function used here includes the exponent 2/3, as suggested in paper [14] and [12].

The viscous wall effect is included in the f_ν term, which is

$$f_\nu = 1 - \exp\left(-\frac{\sqrt{Re_T}}{A_\nu}\right) \quad (8)$$

where the effective turbulence Reynolds number is calculated by

$$Re_T = \frac{f_W^2 k_T}{\nu \omega} \quad (9)$$

In addition, the shear-sheltering effect [23] is included in the f_{SS} term:

$$f_{SS} = \exp\left[-\left(\frac{C_{SS}\nu\Omega}{k_T}\right)^2\right] \quad (10)$$

In order to satisfy the realizability constraint, the turbulence viscosity coefficient C_μ is following Shih [24]:

$$C_\mu = \frac{1}{A_0 + A_s(\frac{S}{\omega})} \quad (11)$$

In Equation 4 the term f_{SS} representing the intermittency effect on the turbulence production is

$$f_{INT} = \min\left(\frac{k_T}{C_{INT} k_{TOT}}, 1\right) \quad (12)$$

Note that the present expression is based on the corrected form by Fürst [14].

Regarding the large-scale turbulence viscosity in Equation 5, the relations are:

$$Re_\Omega = \frac{d^2\Omega}{\nu} \quad (13)$$

$$\beta_{TS} = 1 - \exp \left[-\frac{\max(Re_\Omega - C_{TS,crit}, 0)^2}{A_{TS}} \right] \quad (14)$$

$$f_{\tau,l} = 1 - \exp \left(-C_{\tau,l} \frac{k_{T,l}}{\lambda_{eff}^2 \Omega^2} \right) \quad (15)$$

The dissipation terms should balance the diffusion terms in the laminar sub-layer, which yields Equation 1 and 2:

$$D_T = 2\nu \frac{\partial \sqrt{k_T}}{\partial x_j} \frac{\partial \sqrt{k_T}}{\partial x_j} \quad (16)$$

$$D_L = 2\nu \frac{\partial \sqrt{k_L}}{\partial x_j} \frac{\partial \sqrt{k_L}}{\partial x_j} \quad (17)$$

The bypass transition term R_{BP} and natural transition term R_{NAT} in the transport equations are modeled as:

$$R_{BP} = C_R \beta_{BP} k_L \omega / f_W \quad (18)$$

$$R_{NAT} = C_{R,NAT} \beta_{NAT} k_L \Omega \quad (19)$$

where

$$\beta_{BP} = 1 - \exp \left(-\frac{\phi_{BP}}{A_{BP}} \right) \quad (20)$$

$$\phi_{BP} = \max \left[\left(\frac{k_T}{\nu \Omega} - C_{BP,crit} \right), 0 \right] \quad (21)$$

$$\beta_{NAT} = 1 - \exp \left(-\frac{\phi_{NAT}}{A_{NAT}} \right) \quad (22)$$

$$\phi_{NAT} = \max \left[\left(Re_\Omega - \frac{C_{NAT,crit}}{f_{NAT,crit}} \right), 0 \right] \quad (23)$$

$$f_{NAT,crit} = 1 - \exp \left(-C_{NC} \frac{\sqrt{k_L d}}{\nu} \right) \quad (24)$$

Table 2: The constants in the $k - k_L - \omega$ transition model

$A_0 = 4.04$	$C_{INT} = 0.75$	$C_{\omega 1} = 0.44$	$A_s = 2.12$
$C_{TS,crit} = 1000$	$C_{\omega 2} = 0.92$	$A_\nu = 6.75$	$C_{R,NAT} = 0.02$
$C_{\omega 3} = 0.3$	$A_{BP} = 0.6$	$C_{11} = 3.4 \times 10^{-6}$	$C_{\omega R} = 1.5$
$A_{NAT} = 200$	$C_{12} = 1 \times 10^{-10}$	$C_\lambda = 2.495$	$A_{TS} = 200$
$C_R = 0.12$	$C_{\mu,std} = 0.09$	$C_{BP,crit} = 1.2$	$C_{NAT,crit} = 1250$
$C_{\tau,l} = 4360$	$C_{NC} = 0.1$	$C_{SS} = 1.5$	$\sigma_k = 1, \sigma_\omega = 1.17$

157 All the constants appeared in the model are summarized in Table 2. A
158 thorough description of their physical meanings is available from the original
159 paper[13] and they are also expressed in Table 3.

160 2.3. Case setup and grid independence study

161 The wind turbine airfoil of interest is the DU91-W2-250 with 25% c thick-
162 ness. It is a widely used airfoil for the inboard part of commercial wind
163 turbine blades [25][26]. The airfoil has a blunt trailing edge with thickness
164 of 0.2% c . Structured O -type grid is generated around the airfoil surface, see
165 Figure 4. The outer boundary of the simulation domain extends 100 chord
166 length from the airfoil's aerodynamic centre ($\frac{1}{4}c$) so as to minimize the far-
167 field boundary effect. The first wall-normal grid distance from the airfoil
168 surface is small enough to ensure the dimensionless wall distance $y^+ < 1$,
169 such that the viscous sublayer of the turbulent boundary layer can be re-
170 solved. The requirement of $y^+ < 1$ is essential in use of $k - k_L - \omega$ model
171 [13]. A stretching ratio of 1.1 for near-wall grid is applied to smoothly in-
172 crease the size of the grid cells in the wall-normal direction. As transition
173 takes place across a very short distance, the number of nodes along airfoil
174 surface should be fine enough ($\sim 0.003c$) to capture transition and to resolve
175 the laminar separation bubble.

176 The SIMPLE algorithm [27] is used to decouple the pressure and ve-
177 locity of the steady-state incompressible Navier-Stokes equations. Second-
178 order discretization scheme is chosen for both the convection and diffusion
179 terms. The total variation diminishing limited linear differencing schemes
180 with Sweby limiter are applied for velocity and turbulence quantities. All
181 the residuals converge to a magnitude less than 10^{-4} after 10^4 iterations.
182 Meanwhile, the lift and drag coefficients also converge. The boundary con-

Table 3: Physical meanings of the quantities in the $k - k_L - \omega$ transition model.

Name	Meaning
D_L	laminar kinetic energy dissipation
D_T	turbulent kinetic energy dissipation
P_{k_L}	laminar kinetic energy production
P_{k_T}	turbulent kinetic energy production
R_{BP}	bypass transition production
R_{NAT}	natural transition production
Re_T	turbulence Reynolds number
Re_Ω	vorticity-based Reynolds number
S	magnitude of mean strain rate tensor
Ω	magnitude of mean rotation rate tensor
α_T	effective diffusivity for turbulent quantities
β_{BP}	bypass transition threshold function
β_{NAT}	natural transition threshold function
β_{TS}	Tollmien-Schlichting threshold function
λ_T	turbulent length scale
λ_{eff}	effective turbulent length scale
ν	molecular kinematic viscosity
$\nu_{T,l}$	turbulent kinematic viscosity of large scale eddy
$\nu_{T,s}$	turbulent kinematic viscosity of small scale eddy
ω	specific dissipation rate
ϕ_{BP}	model bypass transition parameter
ϕ_{NAT}	model natural transition parameter
d	wall distance
f_W	inviscid near-wall damping function
f_ν	viscous damping function
f_ω	boundary layer wake term damping function
f_{INT}	intermittency damping function
f_{SS}	shear-sheltering damping function
$f_{\tau,l}$	time-scale damping function
k_T	turbulent kinetic energy
$k_{T,l}$	effective "large-scale" turbulent kinetic energy
$k_{T,s}$	effective small-scale turbulent kinetic energy
k_{TOT}	total fluctuation kinetic energy, $k_T + k_L$

183 dition at the inlet is specified as Dirichlet-type condition with fixed value
 184 for the velocity and turbulent intensity, while Neumann boundary condition
 185 with zero gradient is set at the outlet boundary. A non-slip wall condition is
 186 applied at the airfoil surface. Free-stream turbulence is specified through the
 187 turbulence intensity Tu and its length scale l . In order to facilitate proper
 188 comparison with experiment, the choice of Tu follows that in the wind tunnel
 189 measurement carried out with $Tu = 0.06\%$. The turbulent length scale is
 190 estimated to be $l = 1mm$, corresponding to the $1mm$ diameter of the wire
 191 mesh in the wind tunnel settling chamber. The inlet boundary condition
 192 including velocity and turbulent parameters is summarized in Table 4.

193 Four grid densities as listed in Table 5 are investigated to check grid
 194 independence as well as to examine the capability in transition identification

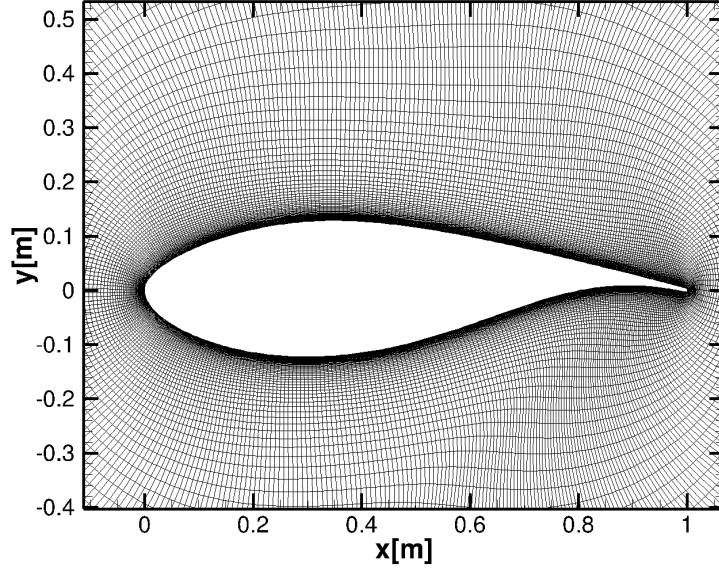


Figure 4: Grid around the DU91-W2-250 airfoil.

Table 4: Inlet boundary condition in the simulation.

Name	Quantity
α	6.24°
Re_c	1.0×10^6
k_T	$1.152 \times 10^{-4} \text{ m}^2/\text{s}^2$
ω^1	10.73 s^{-1}
Tu	0.06%
ν_T/ν	0.73

195 at $Re_c = 1.0 \times 10^6$ and $AoA = 6.24^\circ$. The maximum y^+ along the airfoil
 196 surface is also included in Table 5. The distributions of pressure coefficient
 197 using the four grids are shown in Figure 5. It is apparent that transition,
 198 which is represented by the kink in the C_p curve, is not captured by Grid
 199 A and B. The C_p curves from Grid C and D overlap, thus grid independent
 200 solution is obtained by Grid C. Since the 2D computation is not so expensive,
 201 Grid D with node size of $851 \times 387 \times 2$ is adopted for the present simulations.

Table 5: Grid configurations used in grid independence study

Case	Nodes distribution	y^+	Total cells
A	$151 \times 68 \times 2$	<2	20,536
B	$302 \times 137 \times 2$	<1	82,748
C	$602 \times 274 \times 2$	<0.5	329,896
D	$851 \times 387 \times 2$	<0.3	658,674

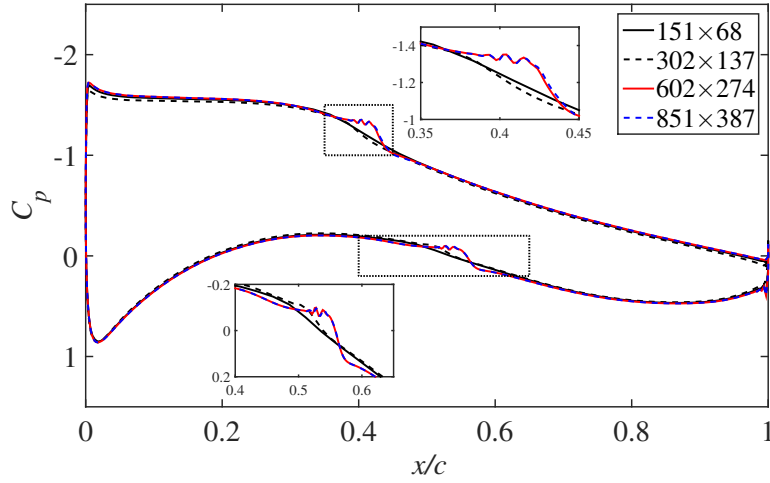


Figure 5: Mesh resolution study of the pressure coefficient C_p

202 3. Results and discussions

203 In this section, simulation result at $\alpha = 6.24^\circ$ is studied comprehensively.
 204 The boundary layer transitions resulted from a range of AoAs are later inves-
 205 tigated, aiming to reveal the effect from AoA. Finally, the effects of $k - k_L - \omega$

206 transition model on the integral aerodynamic characteristics, including C_L
 207 and C_D , are discussed.

208 3.1. Transition at $\alpha = 6.24^\circ$ with $Re = 1.0 \times 10^6$

209 Flow validation is first performed for the case of AoA $\alpha = 6.24^\circ$ with
 210 $Re = 1.0 \times 10^6$ through lift and drag coefficients and pressure distribution.
 211 The transition result is also analyzed in detail so as to reveal the transition
 212 process resolved by the model and the role of laminar separation bubble in
 213 transition.

214 3.1.1. Comparison with experiment.

Table 6: Comparison of C_l and C_d at $Re = 1.0 \times 10^6$

	$k - k_L - \omega$	$k - \omega$ SST	Experiment
C_l	1.2362	1.1095	1.133
C_d	0.0146	0.0226	0.0121
Transition at upper surface (x/c)	0.36~0.42	-	0.43
Transition at lower surface (x/c)	0.48~0.56	-	0.53

215 The wind tunnel measurement database for the DU-W2-250 airfoil allows
 216 comparison of surface pressure distribution, lift and drag coefficients, as well
 217 as transition location. The pressure distributions along the upper and lower
 218 surfaces are compared in Figure 6, where the result of $k - \omega - SST$ model
 219 is also included. Note that the simulation using $k - \omega - SST$ model is
 220 carried out with the same grid (Grid D). Both models exhibit reasonably
 221 good performance in surface pressure prediction. Since the lift coefficient is
 222 mainly determined by the pressure over airfoil, C_L for both models are within
 223 10% difference, see Table 6.

224 The boundary layer transition is represented through the kink in the curve
 225 of pressure distribution returned by $k - k_L - \omega$ model at $x/c \approx 0.4$ on the
 226 suction side and $x/c \approx 0.5$ on the pressure side. The pressure undulation
 227 associated with transition is perhaps caused by the unsteady nature of the
 228 laminar separation bubble, which will be discussed in Section 3.1.2. The
 229 transition locations on the upper and lower surfaces at $\alpha = 6.24^\circ$ are also
 230 listed in Table 6. Note that the transition locations in present simulation

are represented through the streamwise extension of the laminar separation bubble, which is the distance between the separation point of laminar boundary layer and the reattachment point of turbulent boundary layer. It can be found that the reattachment point agrees with the wind tunnel measurement. In contrast, no such pressure kink is present in the pressure curves of $k - \omega$ SST model, which simulates the fully turbulent boundary layer.

The drag coefficient C_D is more sensitive to laminar turbulence transition. Because the turbulent boundary layer produces larger friction than the laminar boundary layer, failure in transition prediction will result in significant discrepancy in C_D . Strikingly different C_f parameters are predicted by the two models, see Figure 7. Because the $k - \omega - SST$ model is not able to model transition, larger c_f is predicted in the portion before transition on both surfaces, resulting in a drag coefficient 86% larger than that in the wind tunnel measurement. The $k - k_L - \omega$ model apparently has better accuracy in C_D , only 20% larger. The drag coefficient for both models are also compared in Table 6.

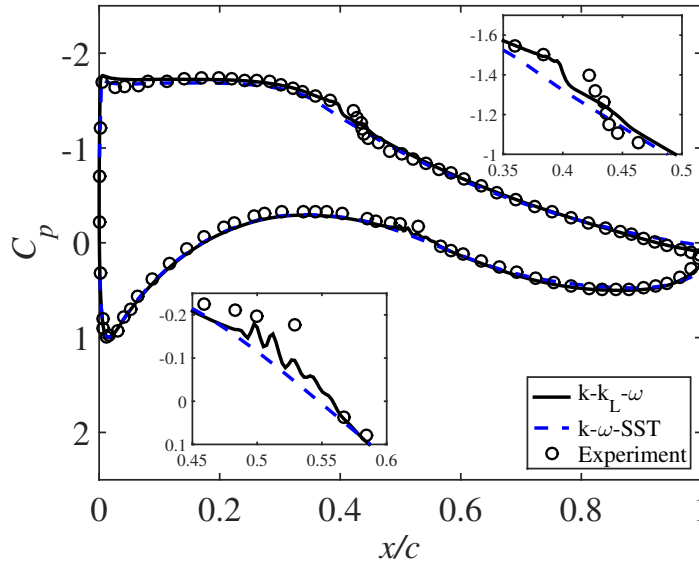


Figure 6: Pressure coefficient C_p distributions along airfoil surfaces

3.1.2. Transition on the airfoil

The laminar separation bubble

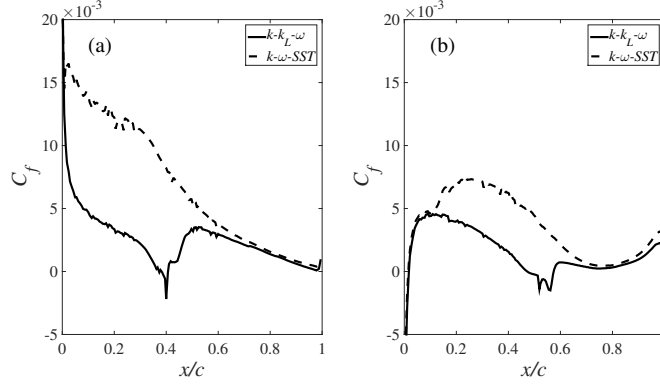


Figure 7: Skin friction coefficient c_f distributions along airfoil surface. Upper surface c_f (left), lower surface c_f (right)

249 The negative values of C_f inside the transition region in Figure 7 suggest
 250 that flow recirculation takes place with boundary layer transition. Since
 251 the result of the $k - \omega - SST$ model is also included. The higher values
 252 of C_f before transition again suggests that transition is not resolved by the
 253 $k - \omega - SST$ model. The two transition regions containing separation bubbles
 254 on the upper and lower surfaces are enlarged in Figure 8. Both separation
 255 bubbles are in fact tiny in size. The one on the upper surface is centered at
 256 about $x/c = 0.39$ with length of $0.06c$ and height less than $0.001c$, while the
 257 other one on the lower surface is centered more downstream at $0.51c$ with
 258 longer length of $0.08c$ and smaller height of $0.0002c$.

259 Boundary layer evolution

260 Visualization of the boundary layer evolution is useful in understanding
 261 the transition process. Three typical boundary layer profiles in laminar,
 262 transitional and turbulent stages on the upper surface are therefore plotted
 263 respectively in Figure 9. Note that the velocity magnitude U_t in the profiles
 264 is the tangential velocity component along the wall-normal direction. The
 265 turbulent boundary layer profiles predicted by the $k - \omega - SST$ model at
 266 the same locations are also included and used as a reference of turbulent
 267 boundary layer.

268 The boundary layer is of laminar type with thickness $\delta_{kkl} = 1.87mm$ at
 269 $x/c = 0.20$, corresponding to a local Reynolds number $Re_l = 240,000$. The
 270 local Reynolds number is defined as $Re = \frac{U_t l}{\nu}$, where l is the surface distance
 271 between stagnation point and the local position. This profile is less full than
 272 the turbulent one, whose thickness is $\delta_{k\omega} = 4.05mm$.

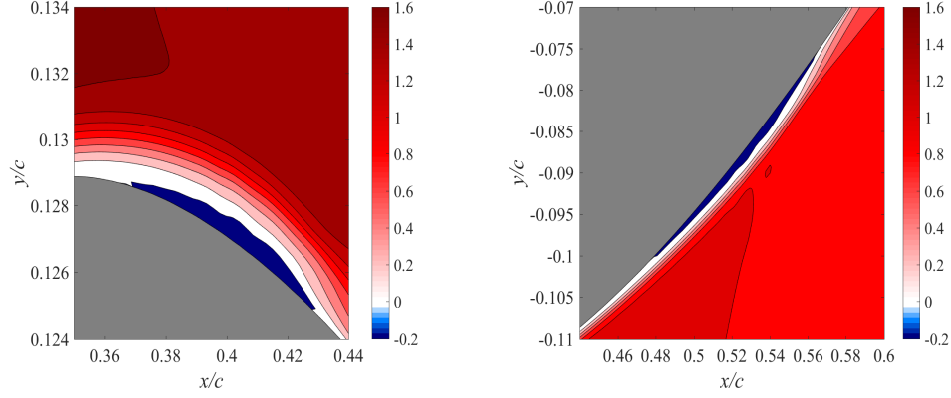


Figure 8: The contours of streamwise velocity component on the airfoil upper surface (left) and lower surface (right).

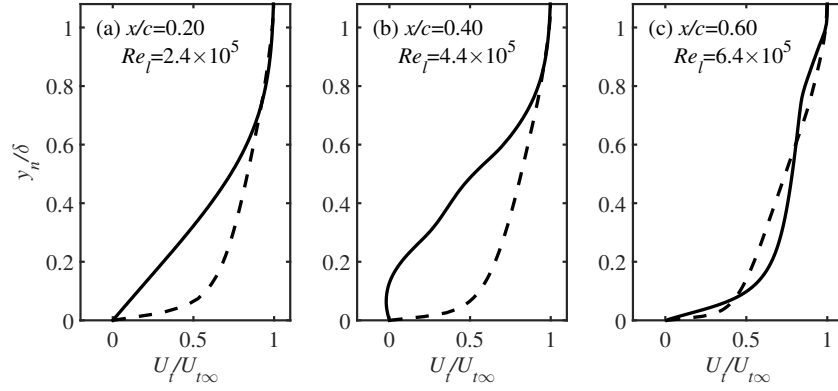


Figure 9: Boundary layer evolution along upper surface: (a) laminar; (b) transition; (c) turbulent. δ is the boundary layer thickness, which is determined by using $0.99U_{t\infty}$. The solid profile (—) is the boundary layer from $k - k_L - \omega$ model, the dashed profile (- -) is the boundary layer profile from $k - \omega$ SST model

273 In the transition region at $x/c = 0.40$ and $Re_l = 440,000$, velocity deficit
 274 is present due to the presence of separation bubble at the immediate vicinity
 275 of the wall. The boundary layer thickness is $\delta_{kkl} = 3.35mm$ and $\delta_{k\omega} =$
 276 $7.85mm$ for the $k - k_L - \omega$ and $k - \omega$ SST models, respectively. Further
 277 downstream at $x/c = 0.60$ and $Re_l = 640,000$, a typical turbulent boundary
 278 layer profile ($\delta_{kkl} = 6.43mm$ and $\delta_{k\omega} = 14.75mm$) is obtained. The laminar
 279 and turbulent boundary layer profiles at $x/c = 0.20$ and 0.60 respectively are
 280 further compared in wall-unit, see Figure 10. The linear viscous sublayer at
 281 $x/c = 0.2$ extends up to $y^+ \sim 30$, whereas, the turbulent profile has a log
 282 portion between $y^+ = 40 \sim 110$ and the viscous sublayer is also well resolved,
 283 which extends till $y^+ \sim 20$.

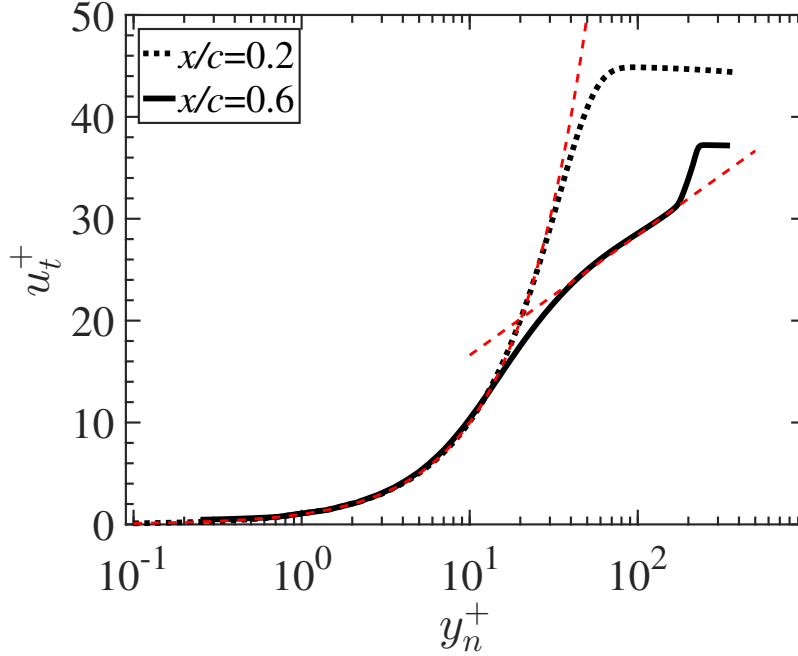


Figure 10: Laminar and turbulent boundary layers in wall unit on the upper surface predicted by $k - k_L - \omega$ model.

284 3.1.3. Laminar kinetic energy and turbulent kinetic energy

285 The transition process is also featured with the evolution of laminar
 286 kinetic energy and turbulent kinetic energy. According to the theory of
 287 $k - k_L - \omega$ model, k_L dominates the laminar region, where k_T should be zero.

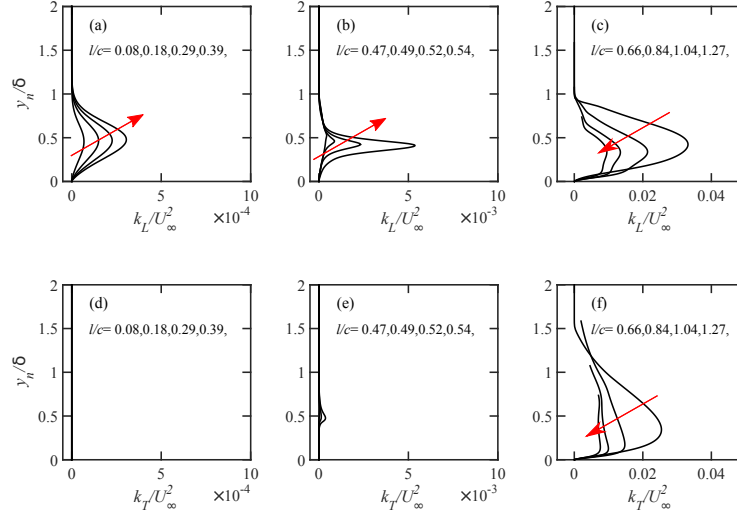


Figure 11: Evolution of laminar kinetic energy k_L and turbulent kinetic energy k_T on the upper surface in laminar region (a)(d), transition region (b)(e) and turbulent region (c)(f). The arrow indicates the increase of l/c , where l is the arc length along the upper surface.

288 Following the onset of transition, k_T starts to increase in the transitional
 289 part, representing the generation of turbulence. Evolutions of k_L and k_T
 290 in the laminar, transitional and turbulent regions are shown in Figure 11. The
 291 magnitude of k_L increases linearly in the laminar region while no k_T is present
 292 in this part. In the transitional region (see Figure 11(b)), k_L is subject to
 293 exponential growth, and k_T begins to appear, although its intensity is still
 294 much smaller than k_L . In the turbulent region, k_L and k_T grow initially to
 295 a maximum magnitude of $0.035U_\infty^2$ and $0.025U_\infty^2$ respectively. The intensity
 296 burst for both is later followed by a decay close to the trailing edge, see Fig-
 297 ure 11(c). The two quantities on the lower surface have similar evolution,
 298 thus they are not shown here for conciseness.

299 3.2. Angle of attack effect on transition

300 In order to study the capability of $k - k_L - \omega$ transition model to predict
 301 the location of transitional laminar separation bubble for a range of angle
 302 of attack. Five angles of attack ranging from -3° to 10° are simulated.
 303 These angles of attack are chosen in the linear regime because the RANS
 304 simulation is known to predict accurate results. The transition locations


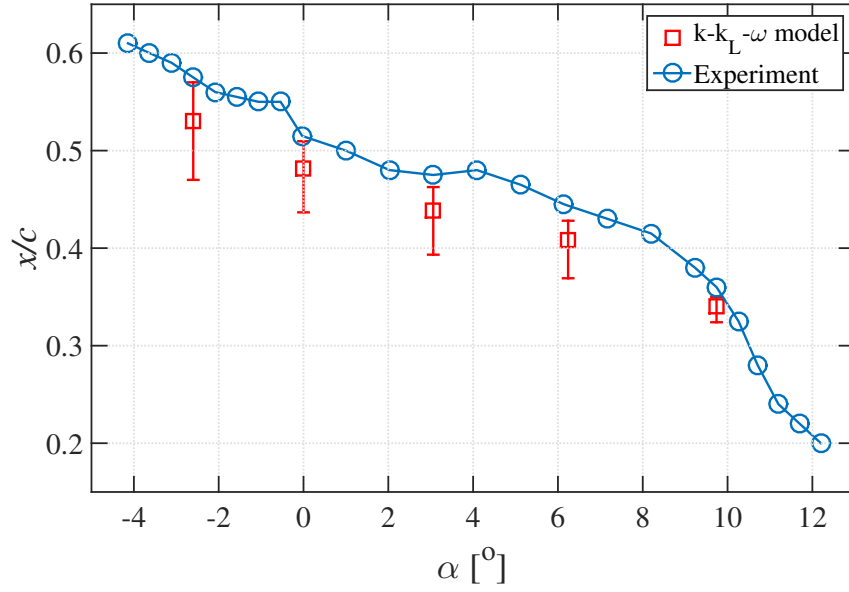


Figure 12: Comparison of transition location on the upper surface between $k - k_L - \omega$ prediction and TU Delft wind tunnel measurement, the red square represents the center of the recirculating flow in the laminar separation bubble.

are first compared with experiment in Figure 12. The transition location predicted by present simulations is again represented through the start and end points of the laminar separation bubble.

The airfoil model for low turbulence wind tunnel measurement is of high surface finish to ensure natural transition. According to the procedure of using microphone in the wind tunnel measurement for transition detection, the transition location is based on the first location along airfoil where pressure fluctuation intensity is amplified. In the present simulations, the end point of the separation bubble is close to the measured transition location, although the offset grows slightly when AoA is larger than 3° . Some of the behaviors exhibited by the laminar separation bubble, such as the upstream motion and the size reduction, can already be observed in Figure 12, but they will be discussed in more detail through the boundary layer velocity contours and evolution of boundary layer profiles.

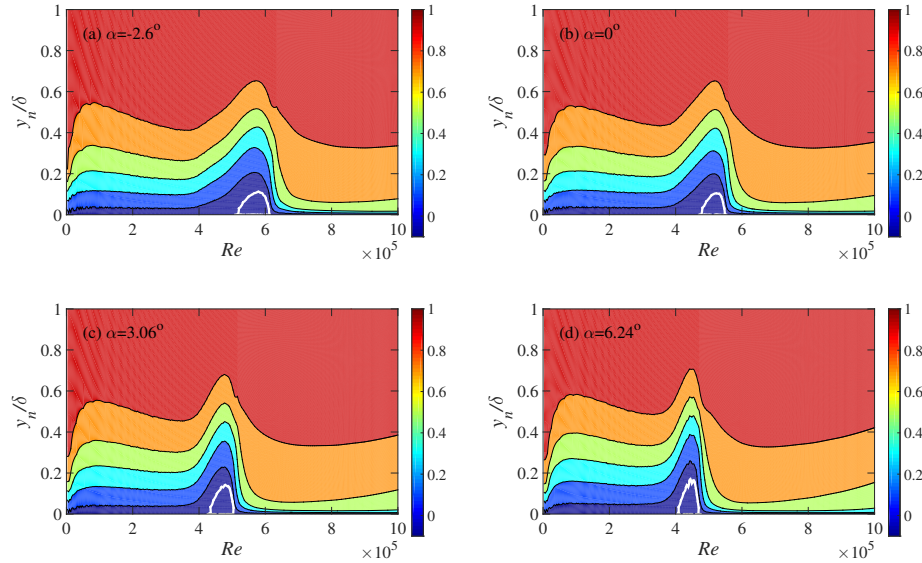

[options]class

Figure 13: Contour of tangential velocity $U_t/U_{t\infty}$ on the upper surface at different angles of attack, $U_{t\infty}$ is the local “free stream” velocity.

The contours of tangential velocity U_t for $\alpha = -2.6^\circ, 0^\circ, 3.06^\circ$ and 6.24° are shown in Figure 13. The laminar separation bubble is highlighted through the dividing contour isoline with value $U_t = 0$. In order to reveal the size of

Table 7: Corresponding Reynolds number of the separation bubble

AoA	Re_l at the starting point of separation bubble	Re_l at the end point of separation bubble
-2.6°	518,000	614,000
0°	477,000	551,000
3.06°	431,000	505,000
6.24°	407,000	471,000
9.74°	365,000	370,000

separation bubble relative to the boundary layer, the wall-normal distance is scaled with the local boundary layer thickness. The separation bubble exhibits slight growth in height: $h = 0.1\delta$ at $\alpha = -2.6^\circ$, while $h = 0.2\delta$ when $\alpha = 6.24^\circ$. The length of separation bubble becomes smaller, which means turbulent boundary layer reattaches within a shorter distance when the angle of attack is higher. The bubble length reduces abruptly when α increases to 9.74° , suggesting a much shorter transition process at larger angle of attack. Due to the tiny separation bubble at $\alpha = 9.74^\circ$, its contour plot is not shown. The corresponding Reynolds number Re_l of the start and end points of the separation bubble at the five angles of attack are summarized in Table 7.

The evolutions of boundary layer profile for the same angles of attack are further visualized in Figure 14. This type of transition visualization provides another perspective in addition to the contour plots. The laminar separation bubble is highlighted through the connection of the points where tangential velocity magnitude is zero. In the pre-transition region, all the boundary layer profiles feature the typical laminar type and the velocity gradient in the near wall region is relatively small, which explains the smaller C_f . Once the separation bubble is produced, the transitional boundary layer deviates from the upstream laminar profile and velocity deficit can be observed right above the reversed flow. After a short recovery distance of about $0.1c$, the profile in the post-transition boundary layers features typical turbulent boundary layer.

3.3. Transition effects on airfoil polar

As shown in Section 3.1.1, the $k - k_L - \omega$ transition model delivers good results in predicting aerodynamic characteristics of the DU91-W2-250 airfoil at $\alpha = 6.24^\circ$. Significant improvement of drag force prediction has been

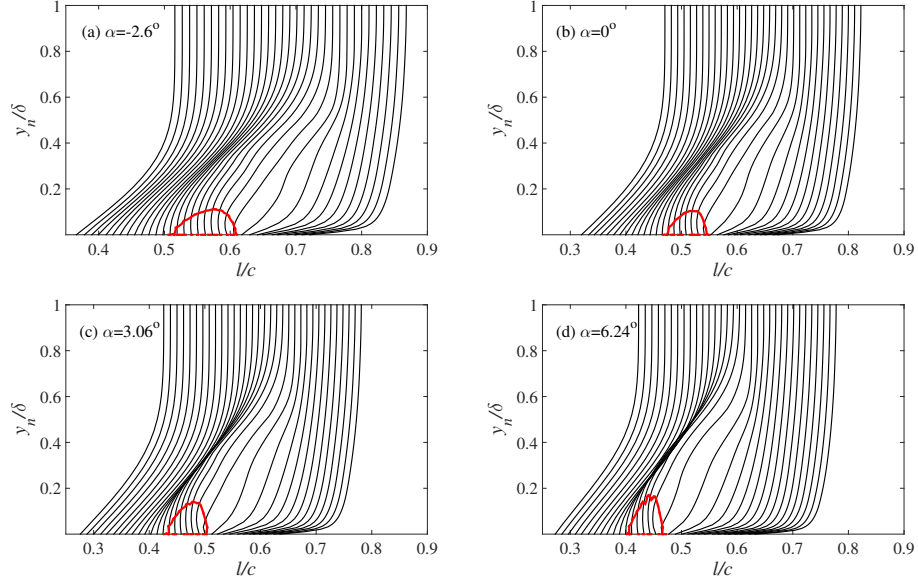


Figure 14: The evolution of boundary layers for different angles of attack. The solid line indicates the laminar separation bubble.

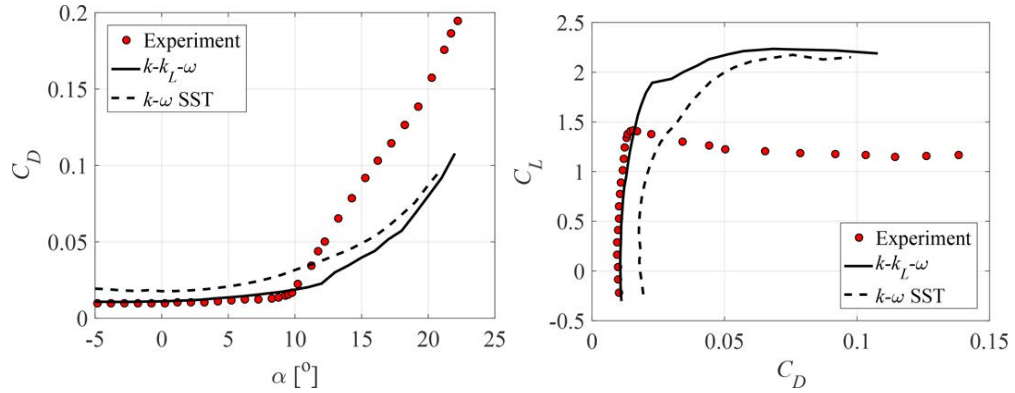


Figure 15: Transition effects on airfoil polars of C_D and C_L/C_D

observed from $k-k_L-\omega$ model in comparison to the $k-\omega-SST$ model. The performance of this transition model is further investigated and evaluated by extending the AOA to a wider range, namely $\alpha = -5^\circ \sim 23^\circ$. Figure 15 presents the results of airfoil drag C_D and C_L/C_D polar. In the linear regime, the drag force by the transition model $k-k_L-\omega$ is in agreement with the experiment, however notable over-prediction is found in the results of the $k-\omega-SST$ model. This observation is consistent with the results in Section 3.1.1 for AoA = 6.24° , and it indicates that in the linear regime CFD simulation with transition modeling is necessary in order to predict C_D and C_L/C_D accurately. When $\alpha > 10^\circ$, due to the large trailing edge flow separation, both RANS models fail to offer good result. Delayed detached eddy simulation (DDES) is recommended for such highly separated flow.

4. Conclusions

The RANS-based three-equation $k-k_L-\omega$ transition model has been successfully applied to simulate the boundary layer transition on the DU91-W2-250 wind turbine airfoil at a range of angles of attack. Validation was performed for the case of AoA $\alpha = 6.24^\circ$. Comparison with wind tunnel measurement demonstrates its accuracy in predicting transition and other quantities including pressure distribution, lift and drag coefficients. Detailed analysis of boundary layer transition at $\alpha = 6.24^\circ$ shows the laminar separation bubble on both airfoil surfaces, which is closely associated with transition. The evolution of boundary layer across transition is studied by evaluating the velocity profiles at three typical stages: laminar boundary layer, transitional boundary layer and fully turbulent boundary layer. The variation of k_L and k_T across transition are also analyzed. Investigation on the flow field at a range of angles of attack clearly indicates that transition moves upstream with the increase of AoA. Regarding the accurate predictions of C_D and C_L/C_D for DU91-W2-250 airfoil in the linear regime ($-3^\circ < \text{AoA} < 10^\circ$), transition model is required and recommended in RANS simulation. This model is inaccurate when large trailing edge separation occurs at AoA $> 10^\circ$. More advanced modeling methodology, such as DDES, is recommended for flow with massive separation.

Acknowledgment

The authors would like to acknowledge Ir.Nando Timmers from TU Delft for the discussion on the experiment. Meanwhile, the financial support of

383 China Scholarship Council is also gratefully acknowledged. Finally, we ac-
384 knowledge the OpenFOAM community and code developers.

385 References

- 386 [1] P. Devinant, T. Laverne, J. Hureau, Experimental study of wind-turbine
387 airfoil aerodynamics in high turbulence, *Journal of Wind Engineering*
388 and *Industrial Aerodynamics* 90 (6) (2002) 689–707.
- 389 [2] A. Monokrousos, L. Brandt, P. Schlatter, D. S. Henningson, Dns and
390 les of estimation and control of transition in boundary layers subject to
391 free-stream turbulence, *International Journal of Heat and Fluid Flow*
392 29 (3) (2008) 841–855.
- 393 [3] S. Lardeau, M. Leschziner, T. Zaki, Large eddy simulation of transitional
394 separated flow over a flat plate and a compressor blade, *Flow, turbulence*
395 and *combustion* 88 (1-2) (2012) 19–44.
- 396 [4] R. Langtry, F. Menter, Transition modeling for general cfd applications
397 in aeronautics, *AIAA paper* 522 (2005) (2005) 14.
- 398 [5] D. Di Pasquale, A. Rona, S. Garrett, A selective review of cfd transition
399 models, *AIIA Paper* (2009-3812).
- 400 [6] F. Menter, T. Esch, S. Kubacki, Transition modelling based on local
401 variables, in: *5th International Symposium on Turbulence Modeling*
402 and *Measurements*, Mallorca, Spain, 2002.
- 403 [7] G. Cheng, R. Nichols, K. D. Neroorkar, P. G. Radhamony, Valida-
404 tion and assessment of turbulence transition models, in: *47th AIAA*
405 *Aerospace Sciences Meeting and Exhibit*, Orlando, FL, No. AIAA-2009-
406 1141, 2009.
- 407 [8] R. B. Langtry, A correlation-based transition model using local variables
408 for unstructured parallelized cfd codes, *Ph.D. thesis*, Univ. of Stuttgart
409 (2006).
- 410 [9] T. Praisner, J. Clark, Predicting transition in turbomachinerypart i: A
411 review and new model development, *Journal of Turbomachinery* 129 (1)
412 (2007) 1–13.

- 413 [10] R. Mayle, A. Schulz, The path to predicting bypass transition, in:
414 ASME 1996 International Gas Turbine and Aeroengine Congress and
415 Exhibition, American Society of Mechanical Engineers, 1996, pp.
416 V001T01A065–V001T01A065.
- 417 [11] D. K. Walters, J. H. Leylek, A new model for boundary-layer transi-
418 tion using a single-point rans approach, in: ASME 2002 International
419 Mechanical Engineering Congress and Exposition, American Society of
420 Mechanical Engineers, 2002, pp. 67–79.
- 421 [12] D. K. Walters, J. H. Leylek, Computational fluid dynamics study of
422 wake-induced transition on a compressor-like flat plate, *Journal of Tur-*
423 *bomachinery* 127 (1) (2005) 52–63.
- 424 [13] D. K. Walters, D. Cokljat, A three-equation eddy-viscosity model for
425 reynolds-averaged navier–stokes simulations of transitional flow, *Journal*
426 *of Fluids Engineering* 130 (12) (2008) 121401.
- 427 [14] J. Fürst, J. Příhoda, P. Straka, Numerical simulation of transitional
428 flows, *Computing* 95 (1) (2013) 163–182.
- 429 [15] C. Turner, Laminar kinetic energy modelling for improved laminar-
430 turbulent transition prediction, Ph.D. thesis, The University of Manch-
431 ester (2012).
- 432 [16] D. D. Sanders, W. F. OBrien, R. Sondergaard, M. D. Polanka, D. C.
433 Rabe, Predicting separation and transitional flow in turbine blades at
434 low reynolds numberspart i: Development of prediction methodology,
435 *Journal of Turbomachinery* 133 (3) (2011) 031011.
- 436 [17] D. D. Sanders, W. F. OBrien, R. Sondergaard, M. D. Polanka, D. C.
437 Rabe, Predicting separation and transitional flow in turbine blades at
438 low reynolds numberspart ii: the application to a highly separated tur-
439 bine blade cascade geometry, *Journal of Turbomachinery* 133 (3) (2011)
440 031012.
- 441 [18] R. Pacciani, M. Marconcini, A. Fadai-Ghotbi, S. Lardeau, M. A.
442 Leschziner, Calculation of high-lift cascades in low pressure turbine con-
443 ditions using a three-equation model, *Journal of Turbomachinery* 133 (3)
444 (2011) 031016.

- 445 [19] I. A. Accordi, M. J. de Lemos, Single-point transition modeling using
446 the laminar kinetic energy concept, *International Journal of Heat and*
447 *Mass Transfer* 89 (2015) 1095–1109.
- 448 [20] H. Medina, J. Early, Modelling transition due to backward-facing
449 steps using the laminar kinetic energy concept, *European Journal of*
450 *Mechanics-B/Fluids* 44 (2014) 60–68.
- 451 [21] R. J. Volino, A new model for free-stream turbulence effects on bound-
452 ary layers, in: *ASME 1997 International Gas Turbine and Aeroengine*
453 *Congress and Exhibition*, American Society of Mechanical Engineers,
454 1997, pp. V003T09A015–V003T09A015.
- 455 [22] B. R. Munson, D. F. Young, T. H. Okiishi, *Fundamentals of fluid me-*
456 *chanics*.
- 457 [23] R. G. Jacobs, P. A. Durbin, Shear sheltering and the continuous spec-
458 trum of the orr–sommerfeld equation, *Physics of Fluids* (1994-present)
459 10 (8) (1998) 2006–2011.
- 460 [24] T.-H. Shih, W. W. Liou, A. Shabbir, Z. Yang, J. Zhu, A new k- eddy
461 viscosity model for high reynolds number turbulent flows, *Computers &*
462 *Fluids* 24 (3) (1995) 227–238.
- 463 [25] W. Timmer, R. Van Rooij, Summary of the delft university wind turbine
464 dedicated airfoils, in: *ASME 2003 Wind Energy Symposium*, American
465 Society of Mechanical Engineers, 2003, pp. 11–21.
- 466 [26] R. Van Rooij, W. Timmer, Roughness sensitivity considerations for thick
467 rotor blade airfoils, in: *ASME 2003 Wind Energy Symposium*, American
468 Society of Mechanical Engineers, 2003, pp. 22–31.
- 469 [27] S. V. Patankar, D. B. Spalding, A calculation procedure for heat, mass
470 and momentum transfer in three-dimensional parabolic flows, *Interna-*
471 *tional Journal of Heat and Mass Transfer* 15 (10) (1972) 1787–1806.