



City Research Online

City St George's, University of London

Citation: Hoffman, Y., Perlman, A., Orr-Urtreger, B., Tzelgov, J., Pothos, E. M. & Edwards, D. J. (2017). Unitization of route knowledge. *Psychological Research*, 81(6), pp. 1241-1254. doi: 10.1007/s00426-016-0811-0

This is the accepted version of the paper.

This version of the publication may differ from the final published version. To cite this item please consult the publisher's version.

Permanent repository link: <https://city-ref-test.eprints-hosting.org/id/eprint/15345/>

Link to published version: <https://doi.org/10.1007/s00426-016-0811-0>

Copyright and Reuse: Copyright and Moral Rights remain with the author(s) and/or copyright holders. Copies of full items can be used for personal research or study, educational, or not-for-profit purposes without prior permission or charge, unless otherwise indicated, provided that the authors, title and full bibliographic details are credited, a hyperlink and/or URL is given for the original metadata page and the content is not changed in any way. For full details of reuse please refer to [City Research Online policy](#).

Psychological Research

Unitization of route knowledge

--Manuscript Draft--

Manuscript Number:	PRPF-D-16-00034R2
Full Title:	Unitization of route knowledge
Article Type:	Original Article
Corresponding Author:	Yaakov S.G. Hoffman, Ph.D. Bar-Ilan University Ramat - Gan, ISRAEL
Corresponding Author Secondary Information:	
Corresponding Author's Institution:	Bar-Ilan University
Corresponding Author's Secondary Institution:	
First Author:	Yaakov S.G. Hoffman, Ph.D.
First Author Secondary Information:	
Order of Authors:	Yaakov S.G. Hoffman, Ph.D. Amotz Perlman, PhD Ben Orr-Urtreger, MA Joseph Tzelgov, PhD Emmanuel M. Pothos, PhD Darren J Edwards, PhD
Order of Authors Secondary Information:	
Funding Information:	
Abstract:	There are many theories that explain how route knowledge is acquired. We examined here if the sequence of elements that are part of a route can become integrated into a single unit, to the extent that the processing of individual transitions may only be relevant in the context of this entire unit. In Experiments 1 and 2, participants learned a route for ten blocks. Subsequently, at test they were intermittently exposed to the same training route along with a novel route which contained partial overlap with the original training route. Results show that the very same stimulus, appearing in the very same location, requiring the very same response (e.g., left turn), was responded to significantly faster in the context of the original training route than in the novel route. In Experiment 3 we employed a modified paradigm containing landmarks, two matched routes which were both substantially longer and contained a greater degree of overlap than the routes in Experiments 1 and 2. Results were replicated, namely, the same overlapping route segment, common to both routes, was performed significantly slower when appearing in the context of a novel than the original route. Furthermore, the difference between the overlapping segments was similar to the difference observed for the non-overlapping segments, i.e., an old route segment in the context of a novel route was processed as if it were an entirely novel segment. We discuss the results in relation to binding, chunking and transfer effects, as well as potential practical implications.
Response to Reviewers:	The graphs have been changed in accordance with the Editor's comment.

Unitization of route knowledge

*Yaakov Hoffman, Interdisciplinary Department of Social Sciences, Bar Ilan University

**Amotz Perlman, Department of Management, Bar Ilan University

Ben Orr-Urtreger, Department of psychology, Ben-Gurion University of the Negev

Joseph Tzelgov, Department of psychology, the Department of Brain and Cognitive

Sciences, and Zlotowski Center for Neuroscience Ben-Gurion University of the

Negev and the Department of Psychology Achva Academic College

Emmanuel M. Pothos, Department of psychology, City University London

Darren J. Edwards, Department of Interprofessional Health Studies, Swansea

University

**Please note that Amotz Perlman and Yaakov Hoffman contributed equally to this publication (order of authorship for these authors was determined by coin toss).

*Address correspondence to: Yaakov Hoffman, Interdisciplinary Department of Social

Sciences, Bar-Ilan University, Ramat-Gan 52900 Israel, telephone-97235317931, fax-

97237374039, Email: hoffmay@biu.ac.il

Abstract

There are many theories that explain how route knowledge is acquired. We examined here if the sequence of elements that are part of a route can become integrated into a single unit, to the extent that the processing of individual transitions may only be relevant in the context of this entire unit. In Experiments 1 and 2, participants learned a route for ten blocks. Subsequently, at test they were intermittently exposed to the same training route along with a novel route which contained partial overlap with the original training route. Results show that the very same stimulus, appearing in the very same location, requiring the very same response (e.g., left turn), was responded to significantly faster in the context of the original training route than in the novel route. In Experiment 3 we employed a modified paradigm containing landmarks and two matched routes which were both substantially longer and contained a greater degree of overlap than the routes in Experiments 1 and 2. Results were replicated, namely, the same overlapping route segment, common to both routes, was performed significantly slower when appearing in the context of a novel than the original route. Furthermore, the difference between the overlapping segments was similar to the difference observed for the non-overlapping segments, i.e., an old route segment in the context of a novel route was processed as if it were an entirely novel segment. We discuss the results in relation to binding, chunking and transfer effects, as well as potential practical implications.

Key words: Route learning, Implicit learning, Chunking, Sequence learning, Unitization

Imagine the following scenario: a driver is driving down the same fixed route for the past week, month or year. Due to road works, the route is diverted, so that for the next several turns she must travel a *new* route which partially overlaps with the original route; e.g., from BLOCK ¹ three to BLOCK six the novel route is exactly the same as the original route. While we expect that the driver will not show the same level of proficiency on the new parts of the *novel* route, what about the old parts of the novel route, those overlapping with segments of the old route? Will these overlapping route sections, which are the same for both the old familiar route and the *novel* route, be treated with the same proficiency? This possibility is intuitive, yet research into chunking reveals an alternative, striking possibility. Namely once a (route) sequence has been sufficiently learned and its representation is unitized, the individual elements comprising it cease to play a role in performance (e.g., see Perlman, Hoffman, Tzelgov, Pothos & Edwards, 2016). Accordingly, specific route information, e.g., "*turn right at this corner*", may only exist in the context of a given familiar route and cease to exist from a performance perspective when the very same information (e.g., making the same right turn at the same corner) is presented in the context of a different route.

This question, in addition to having theoretical value as elaborated below, applies to a multitude of route learners, who as opposed to e.g. taxi drivers, typically follow a fixed route when going from point A to point B, such as mailmen, milkmen, lorry drivers, or GPS guided driving. In such cases, the development of a cognitive map, where the entire geographic area is represented, is less feasible. For example, the first author recently visited London, where he asked a bus driver if he drives close to a certain street, and the bus driver replied that he had "no idea". Fixed route learning

¹ BLOCK (upper-case) refers to a segment connecting two intersections, whilst block (lower-case) refers to a group of experimental trials).

1 may involve different processes at the neural level as well. For example, London bus
2 drivers (fixed route) had smaller hippocampal volume than did taxi drivers (non-fixed
3 route), who were matched for mileage and stress (Maguire, Woollett, & Spiers, 2006).
4
5

6
7 Typically, route learning is assumed to occur by non-unitized item specific
8 information. Paths, edges, districts, landmarks etc. have been suggested as important
9 cues in route learning (Epstein, & Vass, 2014, Gillner & Mallot, 1998; Kuipers, 1978,
10 2000; Kuipers, Tecuci, & Stankiewicz, 2003; Meilinger, 2008, Meilinger,
11 Frankenstein, & Bühlhoff, 2014; Werner, Krieg-Brückner, & Herrmann, 2000).
12
13 Additional information corresponds to direction-based strategies, which may rely on
14 information about angular direction at different locations to the final destination, has
15 also been shown to play a role in route learning (Bailenson, Shum, & Uttal, 2000; Fu,
16 Bravo, & Roskos, 2015; Hochmair & Frank, 2002; Sakellaridi, Christova,
17 Christopoulos, Vialard, Peponis, & Georgopoulos, 2015). Another plausible approach
18 was suggested by Newell and Simon (1972), whereby arriving at the intended location
19 involves incremental optimization, which is similar to cued recall, whereby one step
20 informs the next (Newell & Simon, 1972). While these theories have substantial
21 differences, they all focus on item specific information, such as a direction, an angle,
22 or a previous step informing a later response. Recently, the notion that route learning
23 is more complex than just simple stimulus response associations and may actually be
24 represented in a unitized manner has been noted (Strickrodt, O'Malley & Wiener,
25 2015; see also Klippel, Tappe, & Habel, 2003; Richter, & Klippel, 2005). Here we
26 extend this notion to empirically address if route unitization, like other forms of
27 unitization typical of the sequence learning domain, renders item-specific information
28 less relevant.
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 While in some of the reviewed studies participants were required to move
2 through space our task involved following a moving dot across a map. Accordingly
3 the spatial learning processes may not be exactly the same. Note, the current design is
4 no less ecological as it is typical of many current navigation applications (e.g., google
5 maps). Further note that this design is compatible with the current goal of addressing
6 if the motor sequence corresponding to spatial responses could be chunked into a
7 unitized representation.
8
9

10
11
12
13
14
15
16
17 Chunking, one of the most basic processes of the cognitive system (e.g.,
18 Boucher & Dienes, 2003; Goldstone, 2000; Knowlton, & Squire, 1996; Miller, 1956;
19 Rosenbaum, Hindorff, & Munro, 1987; Rosenbaum, Kenny, & Derr, 1983; Simon, &
20 Barenfeld, 1969), relates to how elementary units can be bound together in aggregate
21 chunks. In sequence learning (e.g., Cleeremans & McClelland, 1991), for example,
22 the notion of chunking is central and refers to a situation where adjacent stimuli in a
23 fixed sequence may eventually be chunked into a single unit. Chunking is a
24 *hierarchical* process, where individual items (e.g., A, B, C, & D) form sub units (e.g.,
25 AB, CD), which go on to form a single chunk (ABCD) representing an entire
26 sequence (Perlman, Pothos, Edwards & Tzelgov, 2010). Chunking, as a process,
27 necessitates a fixed order (Perlman, et al., 2010; 2015). The underlying assumption in
28 chunking is that, as elementary units co-occur, larger units build up. Such an analysis
29 is motivated from associative learning theory and has been embodied in important
30 research traditions, such as that of connectionism (e.g., Elman, 1990; Rumelhart &
31 McClelland, 1986).
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52

53 When a fixed route is practiced repeatedly, we suggest that it may be viewed
54 as a sequence (e.g., Meilinger, 2008), in the simple sense that individual route
55 segments (e.g., turn right, go left, right and then right) form a sequence. In effect,
56
57
58
59
60
61
62
63
64
65

knowledge of this sequence constitutes route knowledge (Meilinger, et al. 2014). Accordingly, as in other sequence learning paradigms (e.g., Perlman, & Tzelgov 2006; see also Perlman et al., 2015), after learning is acquired, the emphasis may no longer be on specific information, e.g., landmarks, individual turns or cues, but rather on a process of sequential compression (or chunking). The spatial information of represented route is compressed into a single unit of information. For example, consider a route that requires three turns to arrive at a location. Initially, there are three parts of information to process (i.e., turn right, turn left, turn right) whose processing may well be aided by landmarks. Once the entire sequence is learned, the information is compressed (or chunked) into a single unit of information (e.g., “route X”). Showing that fixed-route learning follows the pattern of typical sequence learning would indicate that it is an instance of a broader sequence learning domain.

Moreover, addressing route learning as a chunking process links such learning with other basic processes of the cognitive system, such as development of expert knowledge (e.g., Simon & Barenfeld, 1969), category learning (e.g., Goldstone, 2000; Knowlton & Squire, 1996), working memory (e.g., Miller, 1956), motor control (e.g., Rosenbaum, Hindorff, & Munro, 1987; Rosenbaum, Kenny, & Derr, 1983) and control of complex and dynamic situations (Vallacher & Wegner, 1987). Such a link suggests that in route unitization, like other forms of chunking, participants cease to make use of smaller units (Perlman, et al. 2010) e.g., making a specific left turn following a previous right turn. That is, after unitization develops, such item-specific route information would no longer play a role when traversing the route. Others maintain that representation of smaller units actually may disappear or *decay* (see also e.g., Giroux, & Rey, 2009; Perruchet, Vinter, Pacteau, & Gallego, 2002; Perlman et al., 2015; Pothos & Wolff, 2006). In any case, these studies agree that item specific

1 information no longer plays a key role in performance after the learnt information
2 becomes unitized into a single representation. Thus even if full decay of item-specific
3 information does not ensue, for all intents and purposes such information is not
4 utilized in performance. Accordingly, our research question is: if once the entire fixed
5 route is learned, will the individual route parts become unitized, thereby rendering the
6 item specific information irrelevant to performance? Note, we do not suggest that
7 mapping, landmarks, angles, directions and cued recall are not part of a route mapping
8 process; they most clearly are. Rather, we ask whether a bias can arise in route recall,
9 from the extant theory on unitization, according to which the unitization of route
10 knowledge can eventually supersede representation of individual elements.
11
12
13
14
15
16
17
18
19
20
21
22
23

24 The present paradigm follows the theme outlined in the aforementioned
25 driving example. Namely, we measured performance on an overlapping route
26 segment, common to both a previously learned route (which always appears in red),
27 and to a novel route (which always appears in blue). In other words, both the original
28 red training route and the novel blue route contained the same overlapping route
29 section. Participants were randomly divided into two groups; the sequential group
30 who learned the entire route in sequence and the random group who learned
31 individual route segments not in sequence. We consider whether participants in the
32 sequential group would show different test performance for the very same
33 overlapping route segments when presented in different contexts, i.e., the context of
34 the old training route (red) and the new test route (blue).
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50

51 Accordingly, we expect the following: First, test performance on the red
52 original route should be overall better in the sequential-group than in the random-
53 group. We further predict an overall advantage for the same overlapping route
54 segment when performed in the context of the red route versus the novel blue route.
55
56
57
58
59
60
61
62
63
64
65

We also critically predict a two-way interaction between Group (sequential vs. random) and Route (original vs. novel), so that only participants in the sequential group will demonstrate better performance on overlapping route segments performed in the context of the red (original) route versus the blue (novel) route. This latter interaction is compatible with a unitization account whereby the individual elements cease to play a role.

While the aforementioned result pattern relates to overlapping stimuli, results should be at least as robust in the non-overlapping BLOCKs. We focus on the *overlapping* BLOCKs in Experiments 1 and 2 for two reasons: First, only analysis of overlapping route segments can address unitization. Second, the non-overlapping BLOCKs could not be compared as they comprised different stimuli and responses (although see Experiment 3).

Insert Figure 1 about here

Experiment 1

Method

Participants

Thirty students (7 males, mean age=22.9) from introductory psychology courses at Ben Gurion University participated in the experiment for course credit. All participants reported normal or corrected-to-normal vision.

Apparatus

1 The experiment was conducted using IBM compatible Pentium III computers
2 with 17" monitors. The screen was placed approximately 60 cm from the participants.
3
4 Participants responded by keyboard press. The onset of a stimulus started the timer;
5
6 the stimulus changed location (intersection) as soon as the participant responded.
7
8 Responses were indicated by pressing the 1/0 keys (arrows pointing right/left were
9
10 taped onto these keys). Participants were asked to use the index fingers of both hands
11
12 for key presses.
13
14
15

16 *Stimuli and Procedure*

17
18 The stimuli were all based on two routes, that we call the red and the blue
19
20 routes. Each route comprises of BLOCKs, i.e., segments connecting two nearest
21
22 intersections. An 'intersection' is defined as a map location where one may make a
23
24 turn. As shown in Figure 1, there are 7 BLOCKs connected by 8 intersections in each
25
26 route. The routes were depicted on a city map (Figure 1) via a red line or blue line. At
27
28 all times, both red and blue lines, indicating the two routes, were present, regardless
29
30 of which route participants were responding to (this ensured saliency of the overlap
31
32 between the two routes). During training only the red route was performed, but during
33
34 test both the red and blue routes were performed. Indicating the route segments as
35
36 BLOCKs 1-2, 2-3, 3-4, 4-5, 5-6, 6-7 and 7-8, we note that two BLOCKs (4-5, and 5-
37
38 6) were the same in both routes. BLOCK 4-5 began at intersection 4 and extended to
39
40 intersection 5, and BLOCK 5-6, began at intersection 5 and extended to intersection 6.
41
42 Traversing this same overlapping route segment required exactly the same response to
43
44 the same stimuli at the same location.
45
46
47
48
49
50
51
52

53 Training: Two groups of participants (sequential- vs. random-group)
54
55 underwent extensive training on the red route shown in Figure 1. Both groups were
56
57 instructed to follow the entire red route by monitoring the movement of a smil
58
59
60
61
62
63
64
65

ey and making the appropriate (left/right) response. Following each response, the smiley would move to the next intersection. In the sequential group, the smiley appeared at the beginning of the route and participants had to follow it by arrow-response across the entire route in sequence. A Trial began with the smiley located at the beginning of the training route (intersection 1, Figure 1), where the correct response would be pressing the left-arrow key. A depiction of the third trial is shown in Figure 1, lower panel, where after responding to the first two trials, the smiley moves to the third intersection. The correct response for this trial would be the left arrow which would move the smiley to intersection four, and so on. Once the smiley reached the end of the route it returns to the beginning, and participants begun again. The direction of movement was always from top to bottom.

In the random-group, participants were exposed during training to individual BLOCKs along the red route, and never performed the entire route in sequence. Namely, the smiley appeared at random intersections across the route, participants made a single response (turn), upon which the smiley would randomly “jump” to another intersection. Some learning should occur even for the random condition, as at the very least, participants should gradually learn the correct responses to each intersection.

Training was comprised of 10 blocks², each consisting of 105 trials (traversing 7 BLOCKs 15 times). The response stimulus interval (RSI) separating each sequence (of 7 responses) from each other was 1000 ms. During the RSI, the map appeared with no smiley. Participants did not receive feedback; the smiley jumped to the next intersection even after errors. Note that no feedback was necessary, since the red line,

² As explained above, block (lower-case) refers to a group of trials and not route segment (BLOCKS).

indicating the route, was continuously present on the screen and participants simply had to make the correct responses, at different intersections (indicated by the smiley).

Test: While participants did not perform the blue route during training, it was present, and thus participants during training saw that the overlapping route segment was common to both the red and blue routes. After training, participants in both groups proceeded to the same test, where they had to intermittently perform the old route (red training route) and a blue novel route in a random order. Performance was guided by the smiley which moved in a sequential manner from beginning to end. To reiterate, the only difference between groups was at training, where the random-group never performed the entire route in sequence. There were ten test blocks; each block comprised a red and blue route each appearing once yielding 140 trials. After each test route was performed, it was followed by an RSI of 1000 ms. During both training and test trials, participants had to respond, as fast as possible, by pressing the corresponding arrow key to the appearing smiley.

Results and discussion

The training results reveal improvement across training trials [$F(9, 252) = 54.69$, $MSE = 13871$, $\eta_p^2 = 0.66$, $p < .001$]; from a mean of 612 ms to mean of 351 ms in the experimental group and from a mean of 1008 ms to 699 ms in the control group. These group differences were significant across all blocks [$F(1, 28) = 335.29$, $MSE = 217918$, $\eta_p^2 = 0.92$, $p < .001$], even in the last block [$F(1, 28) = 321.00$, $MSE = 19814$, $\eta_p^2 = 0.91$, $p < .001$].

The key question of interest is whether a unitized representation developed, in a way that individual route segments may no longer be relevant. To answer this question we focused on the differences between overlapping route segments performed in the context of the red and blue routes. Both RT and error data for all test

1 trials were recorded. Comparable analyses were run on both of these measures,
2 yielding similar results, except that some RT effects were not apparent in the error
3 data. There was no evidence of a speed-accuracy trade-off, thus, only RT data from
4 correct responses were included in the analysis and are presented in detail. Average
5 error rates were 3.3% for the sequential group and 2.4% for the control group.
6
7
8
9

10
11
12 Test data: The median RT of each participant for each overlapping intersection
13 was calculated across blocks and averaged across participants, see Figure 2. These
14 medians were submitted to a two-way mixed analysis of variance (ANOVA) with
15 Route (original/novel) and Group (sequential/control) as between subject factors
16 (Figure 2).
17
18
19
20
21
22
23

24 -----
25
26 Insert Figure 2 about here
27
28
29 -----
30
31

32 Performance on the original red route was faster than on the novel blue route
33 [F(1, 28)= 8.402, MSE= 968, $\eta_p^2 = 0.23$, $p < .01$]. Overall performance of the
34 sequential group was marginally better than of the random group [F(1, 28)= 3.781,
35 MSE= 5241, $\eta_p^2 = 0.11$, $p < .07$]. The critical Route by Group interaction was
36 significant [F(1, 28)= 12.734, MSE= 968, $\eta_p^2 = 0.31$, $p < .01$]. Planned comparisons
37 revealed a significant difference within the sequential group, whereby latency was
38 faster when participants responded to the overlapping BLOCKs appearing in the
39 context of the original (red) route than when responding to these very same route
40 segments appearing in the context of the novel (blue) route [F(1, 28)= 20.799, MSE=
41 967.82, $\eta_p^2 = 0.42$, $p < .001$]. No such effect was found in the random-group [F<1].
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57 Please see Figure 2.
58
59
60
61
62
63
64
65

1 This main finding that RTs in the sequential group were shorter for the very
2 same overlapping intersections (comprising BLOCKs 4-5 and 5-6) in the original
3 route than in the novel route, provides evidence for the type of unitization we
4 hypothesized (see also Perlman et al., 2015). This result suggests that item specific
5 information, which is necessary at least for initial performance, may be superseded,
6 when a unitized representation for the entire sequence emerges (see also Vallacher, &
7 Wegner, 1987).
8
9

10 It might be claimed that unitization was merely an efficient *strategy* in
11 Experiment 1, which resulted in enhanced performance at test. Responding using
12 individual item specific information for both the blue (novel) and red (original)
13 routes, would only benefit 2/7 responses (number of overlapping stimuli), while
14 responding on the basis of a unitized representation would benefit the remaining 5/7
15 responses in the original red route (number of non-overlapping stimuli).
16
17 Consequently, unitization rather than being obligatory may merely be a preferred
18 strategy employed only when there is no (cognitive) reason to utilize item-specific
19 information. Indeed, Perlman et al. (2010) showed that an increase in sequence
20 overlap renders unitization less likely. Yet Perlman et al.'s study concerned the
21 *emergence* of unitization and not the application of the corresponding knowledge
22 during test, after unitization was (presumably) generated. Nevertheless, motivated by
23 these ideas, we can ask a similar question: assuming a unitized representation has
24 already emerged, is it the case that it will be utilized when less efficient? Cognitively,
25 as the overlap between a learned sequence and a novel one increases, perhaps it would
26 make more sense to abandon a unitized representation and revert to item-specific
27 information. The converse possibility is that, once a unitized representation has
28 emerged, its use is *obligatory*, regardless of its efficiency in subsequent application of
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

the corresponding knowledge (Perlman, & Tzelgov, 2006). In Experiment 2 we examine if the same result pattern would be observed when overlap increases to 3/7 (from 28% to 42%).

Experiment 2

In Experiment 2 the degree of overlap between routes increased to include intersections 4, 5 and 6 (BLOCKs 4-5, 5-6, and 6-7, see Figure 3). Observing the same pattern of results as in Experiment 1 would suggest that a unitized representation, once generated, will be employed in an obligatory way, such that it is not possible to discard it, even if it becomes less efficient to utilize.

Method

Thirty university students (7 Males, Mean age=24.0) who did not take part in Experiment 1, participated in Experiment 2. The map used in this experiment is presented in Figure 3. Aside from increased overlap this experiment was identical to Experiment 1.

Insert Figure 3 about here

Results and discussion

Visual inspection of the mean latencies in the various conditions presented in Figure 4 show that the results of the experiment are broadly similar to those of Experiment 1. As before, to address how sequential vs. random (control) training affects performance, we focused on test performance. Regarding training, we briefly mention that there was evidence for improvement [$F(9, 243) = 27.01$, $MSE = 25146$, $\eta_p^2 = 0.50$, $p < .001$], from a mean of 637 ms to a mean of 387 ms in the sequential group and from a mean of 1148 ms to 726 ms in the control random group. These

differences between groups was also significant [$F(1, 27) = 82.03$, $MSE = 1110335$, $\eta_p^2 = 0.75$, $p < .001$] even in the last block [$F(1, 27) = 152.04$, $MSE = 39262$, $\eta_p^2 = 0.84$, $p < .001$].

Both RT and error data for all test trials were recorded. Comparable analyses were run on both of these measures, yielding similar results, except that some RT effects were not apparent in the error data. As in Experiment 1, there was no evidence of a speed-accuracy trade-off, thus, only the RT data are presented in detail. Average error rates were 4% for both groups. Only RTs from correct responses were included in the analysis.

As previously, for each participant, the median RT for each overlapping intersection was calculated for all blocks and averaged across participants, see Figure 4. These medians were submitted to a two-way mixed analysis of variance (ANOVA) with Route (original/novel) and Group as a between subjects factor (Figure 4). As previously we focus on the interaction of Group by Route along with the accompanying simple main effects. While the random group should show no differences between performing the overlap route segments in the context of the two routes (original-red/novel-blue), the sequential group should show better performance for the overlapping BLOCKs in the context of the original route vs. the novel route.

Insert Figure 4 about here

The critical Route with Group interaction was significant [$F(1, 28) = 5.717$, $MSE = 437$, $\eta_p^2 = 0.16$, $p < .05$]. Planned comparisons reveal (see Figure 4) a significant difference in the sequential group, where latency was faster when participants responded to overlapping BLOCKs appearing in the context of the

original route than when responding to these very same BLOCKs when they appeared in the context of the novel (blue) route, $[F(1, 28) = 7.193, \text{MSE} = 4370, \eta_p^2 = 0.20, p < .05]$. No such effect was found in the random group $[F < 1]$.

In both experiments, the sequential group responded faster to the very same overlapping route segments when they appeared in the context of the original route than when they appeared in the context of the novel route. Such results are consistent with unitization of route learning occurring only in the sequential group. Showing this same result pattern for increased overlap between routes where there is less utility for a unitization strategy is consistent with unitization being less of a strategy and more of an obligatory process that occurs regardless of overlap degree (Perlman, & Tzelgov, 2006). Once unitization develops, item specific information, such as specific individual responses, may be less relevant to performance and execution of route knowledge (see also Perlman et al., 2015).

In Experiments 1 and 2 a single route was employed at training and two routes at test. Participants learned a specific given red training route, and at test, performance of the same overlapping route segment was examined in both the context of this red route and in the context of a novel blue route. It is possible (although unlikely) that results may have been affected by this design. Also, having a single training route and a single novel route in test rendered impossible the comparison between overlapping and non-overlapping intersections. In Experiment 3 we ask whether the impairment in performing the overlapping route segment in a novel context is similar in magnitude to performing a new route segment (non-overlapping). In other words, is an old route segment appearing in a new context treated it as if it were a new route segment? Accordingly, Experiment 3 employed two counterbalanced routes, which were shown to be equally difficult, enabling comparisons between non-overlapping segments.

In addition, we rectified some limitations of the first two experiments. First, perhaps unitization effects are limited to relatively short routes comprising even shorter overlapping segments. Unitization has been shown to be limited in sequence learning paradigms to motor chunks involving only 4 or 5 elements (Ganor-Stern, Plonsker, Perlman, & Tzelgov, 2013; Verwey, Shea, & Wright, 2015). Thus in Experiment 3, route length was increased to 15 intersections comprising an overlapping segment of six BLOCKs. Second, in Experiments 1 and 2 there were no landmarks that could cue participants. It can be claimed that unitization in route learning would be less necessary in the presence of landmarks, as learning can develop by associating turns to landmarks (Epstein, & Vass, 2014). Would evidence for unitization exist when landmarks are able to cue participants to familiar route segments? Demonstrating similar results even in the presence of salient landmarks would render the current claims more robust. Third, it might be claimed that showing the whole route on the screen continuously (as in Experiments 1 and 2) facilitated unitization. In Experiment 3, route presentation is limited by participants' progress. Finally, it could be claimed that showing both routes across training, which on the one hand is advantageous in rendering overlap more salient, may on the other hand have been disadvantageous. For example it may have allowed for some passive learning of the route intended as novel. In Experiment 3, only the route that was performed was shown at any given time.

Experiment 3

The goal of Experiment 3 was to rectify the aforementioned points and to examine if an old route segment that appears in the context of a novel route is performed like a new (non-overlapping) route segment. Like previous experiments,

unitization would be demonstrated by comparing performance for the same overlapping segments from the original and novel routes. If item specific information is relevant to performance, participants would by definition recognize (at least show benefit for) the relatively long overlapping segment comprising the same stimuli, locations and response. Consequently, making the same response sequence to the overlapping segment should be similar, regardless of route, even if it is not consciously recognized as overlapping. Yet if item specific information is less relevant after unitization, the overlapping route segments should be responded to differently in the context of the training route than in the context of the novel route, this would demonstrate unitization of the training sequence. If this difference is similar to that observed between the non-overlapping segments of the original and novel routes, it would suggest that an old route segment presented in the context of a new route is akin to a novel stimulus.

Method

Participants

Thirty students (5 males, Mean age=25) from introductory psychology courses at Bar Ilan University participated in the experiment for course credit. All participants reported normal or corrected-to-normal vision.

Stimuli and Procedure

The experiment was programmed in C++, and conducted with IBM compatible Pentium III computers and 17" monitors. The screen was placed approximately 60 cm from the participants. Participants responded by using the computer mouse. The aim of the participant was to follow a target along a route as shown in Figure 5. Response times were recorded.

Unlike Experiments 1 and 2, in this experiment the route was not shown continuously during training, rather it was incrementally drawn, as participants progressed through task. Note, such a procedure is ecological, as in guided route navigation applications (e.g., Waze), the depicted route develops with one's progress. The stimuli are shown in Figure 5a, 5b. The experiment was organized in 25 training blocks and 5 test blocks. At training, participants received one of two routes. Both routes comprised 15 intersections. Each of the two different routes (see Figure 5) contained a common overlapping section comprising six BLOCKs. Half the participants were trained on route A, and half were trained on route B. Each training block consisted of 15 trials. Participants were instructed to follow a pink route-line by moving the Microsoft mouse cursor to a circle at the end of the depicted route segment (see Figure 6). Upon a response, the circle moved to the next intersection. Accordingly, participants were required to "touch" the mouse cursor on the next circle, for the target to move on to the following intersection. For example (see Figure 6), when moving from intersection 7 to 8, participants had to move the mouse along the pink-line, when the cursor touches intersection 8, the pink-line begins moving to intersection 9.

Two test routes, an original route and a novel route were presented intermittently in a random order. As in training, at test as well, performance was guided by tracking the route line with the mouse cursor (arrow, see Figure 5). Participants were required to respond as fast as possible. Each route appeared 5 times during test.

As opposed to both previous experiments where unitization was demonstrated by a Group by Route interaction, in Experiment 3 there was only one group. Accordingly, unitization should be demonstrated by a Route main effect (original vs.

new), which should be significant even for the overlapping segments. Namely, the overlapping route segment in the context of a novel route should be performed significantly slower than in the context of the original route.

Insert Figure 5 about here

Results and discussion

We first checked that there were no overall differences in route difficulty: there was no significant difference across the learning trials between each of the two routes ($F < 1$), indicating that both routes were comparable. Likewise, learning performance for both the overlapping segments of these routes ($F < 1$) and the non-overlapping segments ($F < 1$) was statistically the same.

The mean RTs of each test block of responses were submitted to a two-way analysis of variance (ANOVA) with Route (original-route/novel-route) and Overlap (overlapping/non-overlapping) as within subject factors. The Overlap effect was significant [$F(1,29) = 21.077$, $MSE = 1215$, $\eta_p^2 = 0.42$, $p < .0001$], indicating that the overlapping route segment was performed significantly faster than the non-overlapping route segment. As expected, the critical Route effect was significant [$F(1,29) = 26.591$, $MSE = 829$, $\eta_p^2 = 0.47$, $p < .0001$], indicating that participants performed significantly faster on the original route vs. the novel route. The Route by Overlap interaction was not significant [$F(1,29) = 1.561$, $MSE = 1596$, $\eta_p^2 = 0.05$, $p = 0.22$], indicating that the observed performance advantage for the original vs. novel route evident in the non-overlapping condition was not statistically different than the same performance advantage evident in the very same overlapping route segments. Namely, performance of the non-overlapping route segment in the original route (443

ms) was faster than in the novel route (479 ms). Likewise, performing the overlapping segment in the original route was faster (423 ms) than performance of this very same segment in the novel route (441 ms). Furthermore, these differences were similar; the difference between overlapping segments performed in the context of the old vs, new route was similar to the difference observed between both routes in the non-overlapping route segments.

Unitization in the current experiment was demonstrated even when the length of the entire route and its overlapping segment was doubled. Demonstrating unitization for a segment of six overlapping elements appears to extend previous sequence learning findings where motor chunk size was limited to 4 or 5 elements (Ganor-Stern, et al., 2013; Verwey, Shea, & Wright, 2015). In addition, unitization occurred even when landmarks were available and could have been potentially used, and thus learning could have relied on item-specific representations by associating responses to landmarks (Epstein, & Vass, 2014). Note that landmark processing was not part of task requirement (Strickrodt, et al., 2015) e.g., turn left at the "big oak". Other studies however show that the mere presence of constant landmarks is sufficient to allow their processing in a manner beneficial to route learning (Foo, Duchon, Warren, & Tarr, 2007). Thus while it is likely that landmark processing occurred, future research is required to discern if the obtained results apply to situations where intentional and associational landmark processing are part of task requirement. Finally results indicated that an old route segment in the context of a new route is performed as if it were a completely new route segment.

Insert Figure 6 about here

General discussion

It is typically the case that route learning is assumed to depend on item specific information such as angles, direction or turns (Gillner & Mallot, 1998; Kuipers, 1978, 2000; Werner, et al, 2000; Kuipers, et al, 2003; Meilinger, 2008). Extending previous approaches (Strickrodt, et al., 2015), we have demonstrated here that, after sufficient learning, a unitized representation for a fixed route can emerge. That is, the sequence of elements comprising a route can be unitized. This unitized representation of a route sequence may suffice to guide an individual across the route, in an assumedly more efficient manner, compared to a disjointed non-unitized representation. Similarly, the motor behavior literature also indicates that people have the capacity to control short sequences of actions using chunks, whose elements can be treated collectively (Rhodes, Bullock, Verwey, Averbek & Page, 2004; Sakai, Kitaguchi, & Hikosaka, 2003; Verwey, 1999, 2001; Verwey, Lammens & van Honk, 2002, Verwey, & Wright, 2014). Additionally, in contrast to typical sequence learning paradigms where motor chunks represented subsequences with up to 4 or 5 elements (Ganor-Stern, et al., 2013; Verwey, Shea, & Wright, 2015), Experiment 3 demonstrates unitization of a long sequence consisting of 15 segments. Accordingly, unitization may be not as limited as previously supposed.

As mentioned, the current paradigm involving following a dot across a map may involve different learning mechanisms than route learning in some of the aforementioned route learning studies (e.g., Meilinger, et al., 2014), where one actually moves through space. Thus additional research may be required before concluding that the current results straightforwardly apply to all forms of route

navigation. In any event, this paradigm is ecological because it resembles navigation applications (Google-maps, Waze) where one follows a moving dot across a map.

While a process of unitization is known to be relevant to other sequence learning tasks (Perlman, et al., 2010), these experiments extend earlier results to the domain of procedural route learning. These results suggest a new angle in route learning and navigation, whereby route knowledge, similar to information from other sequence learning paradigms, can be represented in a high density fashion, where all item-specific information, e.g., a specific turn, is compressed into a single unit which cannot be readily unpacked. Thus, as in other domains (Perlman et al., 2010; Perlman et al., 2015), following unitization, the item specific information that preceded learning may cease to be accessible or relevant. Consequently, individual elements no longer appear familiar as indicated by the increased RT for exactly the same turns in the overlapping segment when appearing in the novel route relative to the training route. This suggests that item specific information of a given response (turn) may exist only in the context of a given route, and thereby would only be helpful when performing the same exact route.

Unitization may be advantageous because it reduces the amount of information necessary for representation, i.e., instead of maintaining a representation of seven or fifteen individual turns, one may represent an entire route as a single representation, e.g., "route x", thereby reducing cognitive load. As the route becomes unitized, it constitutes a single object in working memory and thus presumably its representation is less demanding, as opposed to representing seven or fifteen individual units of information. Research by Bo and Seidler (2009) as well as Seidler, Bo, and Anguera (2012) support the link between unitization and working memory. Another advantage of unitization is that the output, such as route navigation, may be

performed automatically; there is no need to consciously retrieve the relevant information (see Ganor-Stern, et al., 2013 for such an account).

Viewing route learning as an automatic execution of a motor sequence does not belittle the importance of item specific information. On the contrary, we believe, in line with other prominent models such as the ACT-R (Adaptive Character of Thought-Rational, Anderson, & Matessa, 1997) theory, that typical learning initially relies on item specific declarative information ("at the big oak tree turn left", "when you reach Macy's turn right"). However, with practice, a route sequence may gradually become unitized and less reliant on item specific information, as is the case with other types of skill learning (see Anderson, & Matessa, 1997). It is interesting to note that, even in the superficially simple examples in the present experiments, an algorithm that qualitatively reproduces our results would not be straightforward. Such an algorithm would still need to be context-dependent, that is, allow for the fact that exactly the same stimuli may be responded to differently in different contexts (for illustration, in Appendix 1 we consider some simple examples of corresponding algorithms).

Sequence learning may lead to sequence knowledge consisting of associations between the stimuli (Mayr, 1996), responses (Willingham, Wells, Farrell, & Stemwedel, 2000), response–stimulus compounds (Ziessler, 1998) or stimulus–response compounds (Schwarb & Schumacher, 2010). The present results demonstrate that these narrow associations consisting of *two* elements are not driving current performance. Associations between two locations were not relevant to performance, thus something more is needed in order to explain learning.

Accordingly, we would expect that drivers who drive along a fixed route may perform their daily driving in an automatic fashion, and so they would not be confused by

changing landmarks (e.g., removal of the oak tree, or relocation of Macy's). Clearly, there is a tradeoff between robustness of the route knowledge and inflexibility, in cases when route variations are expected. Moreover, automaticity of a unitized representation may also produce disadvantages in performance, as changes in a sequence would be more difficult, once a route is unitized. For instance, think of a situation where one frequently travels from X to Y via Route A in 80% of circumstances, then one day wishes to travel from X to Y via Route B, but wrongly takes the turn A instead. As the route sequence (X to Y via A) is a single unit (or decision), more cognitive resources may be needed to be allocated for properly traveling from X to Y via B (this extra processing is manifest through time latencies in classic unitization studies).

In the current study, participants learned the route in a guided manner, a manner of route learning that is highly relevant for everyday life, due to the increasing popularity of navigation aids based on the global positioning system (GPS). Indeed while guided learning may produce fewer errors than non-guided route learning, less spatial awareness may ensue as a result of guided route learning (Li, Zhu, Zhang, Wu, & Zhang, 2013). The implications of the current study pertain to fixed routes. Other disadvantages have been documented for guided vs. non-guided walking (Ishikawa, Fujiwara, Imai, & Okabe, 2008).

Along with the many advantages of a unitized route representation, the current aforementioned *possible* disadvantage has implications for transfer. The rigidity of unitized knowledge may generate a situation of non-transferable learning where knowledge about an overlapping route section in one context will not transfer to another route. Such skill learning may remain specific, as observed for example in sequence learning (Sanchez, Yarnik, & Reber, 2014), perceptual tasks (e.g., Karni &

1 Sagi, 1991) or motor tasks (e.g., Pashler & Baylis, 1991). Conversely, a non-unitized
2 representation should transfer from one context to another, as in the cases of pilots
3 benefiting from a simulation of a flight experience (Gopher, Weil, & Bareket, 1994).
4
5 Transfer of learning has been a central theme in both cognitive psychology and
6
7 practical training courses. The current results can be viewed in this light, as an
8
9 absence of transfer, namely, knowledge of the overlapping same turns did not transfer
10
11 from the training route to the novel route. The current lack of transfer may differ from
12
13 that in related situations, namely, as everything about these overlapping stimuli in the
14
15 present experiments was identical (e.g., stimuli, location and responses), still the same
16
17 stimuli were responded to faster in the context of the familiar route versus the novel
18
19 route. Perhaps transfer would have occurred if the learning procedure varied, and thus
20
21 item specific information would not have been tied exclusively to a given context,
22
23 e.g., a given route (Perlman et al., 2015; see also Green, & Bavelier, 2008, for a
24
25 similar claim). Accordingly if from the beginning of training, turns along a given
26
27 route are equally traveled in the context of other routes, transfer may be more likely.
28
29
30
31
32
33
34
35
36
37 More research is needed to investigate this interesting topic.
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Compliance with Ethical Standards

Funding: This study was not funded.

Conflict of interest: The authors declare that they have no conflict of interest.

Ethics: All procedures performed in the reported studies were in accordance with the institutional ethical committee and with the 1964 Helsinki declaration and its later amendments or comparable ethical standards

Informed consent: Informed consent was obtained from all individual participants included in the study.

References

Anderson, J. R., & Matessa, M. (1997). A production system theory of serial memory. *Psychological Review*, 104(4), 728.

Bailenson, J. N., Shum, M. S., & Uttal, D. H. (2000). The initial segment strategy: A heuristic for route selection. *Memory & Cognition*, 28(2), 306–318.

Bo, J., & Seidler, R. D. (2009). Visuospatial working memory capacity predicts the organization of acquired explicit motor sequences. *Journal of Neurophysiology*, 101, 3125–3116

Boucher, L. & Dienes, Z. (2003). Two ways of learning associations. *Cognitive Science*, 27, 807-842.

Cleeremans, A., & McClelland, J. L. (1991). Learning the structure of event sequences. *Journal of Experimental Psychology: General*, 120, 235–253.

Dienes, Z., & Perner, J. (1999). A theory of implicit and explicit knowledge. *Behavioral and Brain Sciences*, 22, 735–808.

Elman, J.L. (1990). Finding Structure in Time. *Cognitive Science*, 14, 179–211.

Endsley, M.R. (1995). Toward a theory of situation awareness in dynamic systems. *Human Factors*, 37, 32–64.

Epstein, R. A., & Vass, L. K. (2014). Neural systems for landmark-based wayfinding in humans. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 369: 20120533.

Foo, P., Duchon, A., Warren Jr, W. H., & Tarr, M. J. (2007). Humans do not switch between path knowledge and landmarks when learning a new environment. *Psychological research*, 71(3), 240-251.

1 Fu, E., Bravo, M., & Roskos, B. (2015). Single-destination navigation in a
2 multiple-destination environment: a new “later-destination attractor” bias in route
3 choice. *Memory & cognition*, 1-13.
4
5
6

7
8 Ganor-Stern, D., Plonsker, R., Perlman, A., & Tzelgov, J. (2013). Are all
9 changes equal? Comparing early and late changes in sequence learning. *Acta*
10 *Psychologica*, 144(1), 180-189.
11
12
13
14
15

16 Gillner, S., & Mallot, H. A. (1998). Navigation and acquisition of spatial
17 knowledge in a virtual maze. *Journal of Cognitive Neuroscience*, 10, 445–463.
18
19
20

21 Giroux, I., & Rey, A. (2009). Lexical and sub-lexical units in speech
22 perception. *Cognitive Science*, 33, 260–272.
23
24
25

26 Gopher, D., Well, M., & Bareket, T. (1994). Transfer of skill from a
27 computer game trainer to flight. *Human Factors: The Journal of the Human*
28 *Factors and Ergonomics Society*, 36(3), 387-405.
29
30
31
32

33 Goldstone, R. L. (2000). Unitization during category learning. *Journal of*
34 *Experimental Psychology: Human Perception and Performance*, 26, 86-112.
35
36
37
38

39 Golledge, R. G. (Ed.). (1999). Wayfinding behavior: Cognitive mapping and
40 other spatial processes. Baltimore, MD, USA: Johns Hopkins University Press.
41
42
43

44 Green, C. S., & Bavelier, D. (2008). Exercising your brain: a review of human
45 brain plasticity and training-induced learning. *Psychology and aging*, 23(4), 692-701.
46
47
48

49 Hochmair, H. H., & Frank, A. U. (2002). Influence of estimation errors on
50 wayfinding-decisions in unknown street networks—analyzing the least angle strategy.
51 *Spatial Cognition and Computation*, 2(4), 283–313.
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 Ishikawa, T., Fujiwara, H., Imai, O., & Okabe, A. (2008). Wayfinding with a
2 GPS-based mobile navigation system: A comparison with maps and direct
3 experience. *Journal of Environmental Psychology*, 28(1), 74-82.
4
5

6
7 Karni, A., & Sagi, D. (1991). Where practice makes perfect in texture
8 discrimination: evidence for primary visual cortex plasticity. *Proceedings of the*
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

14 Klippel, A., Tappe, H., & Habel, C. (2003). Pictorial representations of routes:
15 Chunking route segments during comprehension. In *Spatial cognition III* (pp. 11-33).
16 Springer Berlin Heidelberg.
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

22 Knowlton, B. J., & Squire, L. R. (1996). Artificial Grammar Learning Depends
23 on Implicit Acquisition of Both Abstract and Exemplar-Specific Information. *Journal*
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

29 Kuipers, B. (1978). Modeling spatial knowledge. *Cognitive Science*, 2, 129–
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

34 Kuipers, B. (2000). The spatial semantic hierarchy. *Artificial Intelligence*, 19,
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

39 Kuipers, B., Tecuci, D. G., & Stankiewicz, B. J. (2003). The skeleton in the
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

46 Li, B., Zhu, K., Zhang, W., Wu, A., & Zhang, X. (2013). A Comparative
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 Maguire, E. A., Woollett, K., & Spiers, H. J. (2006). London taxi drivers and
2 bus drivers: a structural MRI and neuropsychological analysis. *Hippocampus*, 16(12),
3 1091-1101.
4

5 Meilinger, T., Frankenstein, J., & Bühlhoff, H. H. (2014). When in doubt
6 follow your nose—a wayfinding strategy. *Frontiers in Psychology*, 5, 1363.
7

8 Meilinger, T. (2008). The network of reference frames theory: A synthesis of
9 graphs and cognitive maps. In C. Freksa, N. Newcombe, P. Gärdénfors, & S. Wölfl
10 (Eds.), *Spatial cognition VI: Learning, reasoning, and talking about space* (pp. 44–
11 360). Berlin: Springer.
12

13 Mayr, U. (1996). Spatial attention and implicit sequence learning: Evidence
14 for independent learning of spatial and nonspatial sequences. *Journal of Experimental*
15 *Psychology: Learning, Memory, and Cognition*, 22, 350 –364.
16

17 Miller, G. A. (1956). The Magical Number Seven, Plus or Minus Two:
18 Some Limits on Our Capacity for Processing Information. *The Psychological*
19 *Review*, 63, 81-97.
20

21 Newell, A., & Simon, H. A. (1972). *Human problem solving*. Englewood
22 Cliffs, NJ: Prentice-Hall.
23

24 Pashler, H., & Baylis, G. C. (1991). Procedural learning: II. Intertrial
25 repetition effects in speeded-choice tasks. *Journal of Experimental Psychology:*
26 *Learning, Memory, and Cognition*, 17(1), 33-48.
27

28 Perlman, A., Hoffman, Y., Tzelgov, J., Pothos, E. M., & Edwards, D. J.
29 (2015). The notion of contextual locking: Previously learnt items are not accessible as
30 such when appearing in a less common context. *The Quarterly Journal of*
31 *Experimental Psychology*, 1-22.
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 Perlman, A., Pothos, E. M., Edwards, D., Tzelgov, J., & (2010). Task-relevant
2 chunking in sequence learning. *Journal of Experimental Psychology: Human*
3
4
5 *Perception & Performance*. 36, 649-661.
6

7 Perlman, A., & Tzelgov, J. (2006). Interactions between encoding and retrieval
8
9 in the domain of sequence-learning. *Journal of Experimental Psychology: Learning,*
10
11
12 *Memory, and Cognition*, 32(1), 118-130.
13

14 Perruchet, P., & Vinter, A. (2002). The self-organizing consciousness
15
16
17 *Behavioral and Brain Sciences*, 25, 297–388.
18

19 Pothos, E. M. (2007). Theories of artificial grammar learning. *Psychological*
20
21
22 *Bulletin*, 133, 227–244.
23

24 Rhodes B. J., Bullock D., Verwey W. B., Averbach B. B., & Page M. P. A.
25
26
27 (2004) Learning and production of movement sequences: behavioral,
28
29 neurophysiological, and modeling perspectives. *Human Movement Science* 23, 699–
30
31
32 746.
33

34 Richter, K.-F., and Klippel, A. (2005). “A model for context-specific route
35
36
37 directions,” in *Spatial Cognition IV. Reasoning, Action, Interaction*, eds. C. Freksa,
38
39
40 M. Knauff, B. Krieg-Brückner, B. Nebel, and T. Barkowsky (Berlin: Springer), 58–
41
42
43 78.
44

45 Rosenbaum, D. A., Kenny, S. B., & Derr, M. A. (1983). Hierarchical control of
46
47
48 rapid movement sequences. *Journal of Experimental Psychology: Human Perception*
49
50
51 *and Performance*, 9, 86-102.
52

53 Rosenbaum, D. A., Hindorff, V., & Munro, E. M. (1987). Scheduling and
54
55
56 programming of rapid finger sequences: Tests and elaborations of the hierarchical
57
58
59 editor model. *Journal of Experimental Psychology: Human Perception and*
60
61
62 *Performance*, 13, 193-203.
63
64
65

1 Rumelhart, D. E. & McClelland J. L. (1986). Parallel Distributed
2 Processing, Vol. 1, Foundations. Cambridge, Mass: MIT Press.
3

4 Sakai, K., Kitaguchi, K., & Hikosaka, O. (2003). Chunking during human
5 visuomotor sequence learning. *Experimental Brain Research*, 152, 229–242.
6

7 Sakellaridi, S., Christova, P., Christopoulos, V. N., Vialard, A., Peponis,
8 J., & Georgopoulos, A. P. (2015). Cognitive mechanisms underlying instructed
9 choice exploration of small city maps. *Frontiers in neuroscience*, 1-12.
10

11 Sanchez, D. J., Yarnik, E. N., & Reber, P. J. (2014). Quantifying transfer
12 after perceptual-motor sequence learning: how inflexible is implicit learning?
13 *Psychological research*, 79(2), 327-343.
14

15 Schwarb, H., & Schumacher, E. H. (2010). Implicit sequence learning is
16 represented by stimulus–response rules. *Memory & Cognition*, 38, 677–688.
17

18 Seidler, R. D., Bo, J., & Anguera, J. A. (2012). Neurocognitive
19 contributions to motor skill learning: The role of working memory. *Journal of*
20 *Motor Behavior*, 44(6), 445–453.
21

22 Servan-Schreiber, E., Anderson, J. R. (1990). Learning Artificial
23 Grammars With Competitive Chunking, *Journal of Experimental Psychology:*
24 *Learning Memory and Cognition*, 16, 592-608.
25

26 Simon, H. A. & Barenfeld M. (1969), Information-Processing Analysis of
27 Perceptual Processes in Problem Solving. *Psychological Review*, 76, 473-483.
28

29 Strickrodt, M., O'Malley, M., & Wiener, J. M. (2015). This Place Looks
30 Familiar—How Navigators Distinguish Places with Ambiguous Landmark
31 Objects When Learning Novel Routes. *Frontiers in psychology*, 6.
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 Taatgen, N. A. (2002). A model of individual differences in skill acquisition in
2 the Kanfer-Ackerman air traffic control task. *Cognitive Systems Research*, 3, 103–
3
4 112.
5

6
7 Vallacher, R. R., & Wegner, D. M. (1987). What do people think they're doing?
8
9 Action identification and human behavior. *Psychological review*, 94(1), 3-15.
10

11 Verwey, W. B. (1999). Evidence for a multi-stage model of practice in a
12
13 sequential movement task. *Journal of Experimental Psychology: Human Perception*
14
15
16
17
18 and Performance, 25, 1693–1708.

19 Verwey, W. B. (2001). Concatenating familiar movement sequence: The
20
21 versatile cognitive processor. *Acta Psychologica*, 106, 69–95.
22
23

24
25 Verwey, W. B., Lammens, R., & van Honk, J. (2002). On the role of the SMA
26
27 in the discrete sequence production task. A TMS study. *Neuropsychologia*, 40, 1268–
28
29
30 1276.
31

32
33 Verwey, W. B., Shea, C. H., & Wright, D. L. (2015). A cognitive framework for
34
35 explaining serial processing and sequence execution strategies. *Psychonomic bulletin*
36
37
38 & review, 22(1), 54-77.
39
40

41 Verwey, W. B., & Wright, D. L. (2014). Learning a keying sequence you never
42
43 executed: Evidence for independent associative and motor chunk learning. *Acta*
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
psychologica, 151, 24-31.

66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

Werner, S., Krieg-Brückner, B., & Herrmann, T. (2000). Modelling
navigational knowledge by route graphs. In C. Freksa, W. Brauer, C. Habel, & K. F.
Wender (Eds.), *Spatial cognition II: Integrating abstract theories, empirical studies,
formal methods, and practical applications* (pp. 295–316). Berlin, Heidelberg:
Springer.

1 Willingham, D. B., Wells, L. A., Farrell, J. M., & Stemwedel, M. E. (2000).
2 Implicit motor sequence learning is represented in response locations. *Memory &*
3
4
5 *Cognition*, 28, 366 –375.
6

7 Ziessler, M. (1998). Response– effect learning as a major component of
8
9 implicit serial learning. *Journal of Experimental Psychology: Learning, Memory, and*
10
11
12 *Cognition*, 24, 962–978.
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Figure Captions

Fig. 1 Upper panel: The stimuli employed in Experiment 1, which consisted of one learning route (red) and two test routes (the same red route along with a novel blue route). Navigation takes place from the upper part of the map downwards. Note that while only one route is being performed at any given time, both routes are shown throughout learning and test. Travel direction is indicated by the arrow. Lower panel: An example of the third learning trial in Experiment 1. After participants have responded twice via arrow press, the smiley moves to the third intersection. The correct response for this third trial would be the left arrow.

Fig. 2 Mean of median reaction times (RTs) for all test blocks of trials for the original and novel routes, in each condition of Experiment 1.

Fig. 3 The stimuli employed in Experiment 2.

Fig. 4 Mean of median reaction times (RTs) for all test blocks of trials for the original and novel routes, in each condition of Experiment 2.

Fig. 5 The stimuli employed in Experiment 3 for Routes 1 (A) and 2 (B). Note that the overlapping segment in Route A (intersections 3-9) and Route B (intersections 6-12) is exactly the same.

Fig. 6 Example of a learning trial for route 1 (Experiment 3). After responding to the seventh learning intersection by moving the mouse, the subject must move the cursor to the eighth intersection for the route to continue to intersection 9.

Fig. 7 Mean of median reaction times (RTs) for all test blocks of trials for the original and novel routes, in each condition of Experiment 3.

Appendix 1

Simple algorithms for modeling sequence learning: We ask what kind of simple algorithms could, in principle, describe performance in our experiments and, specifically, the key finding that the overlapping stimuli were responded to differently in the practiced sequence than in isolation. These algorithms are clearly not cognitive models, but still they may be useful in that they illustrate the algorithmic complexity of the obtained results. For example, imagine one needs to program the order of operations for a robot from 1 to n. This can be done in several ways, A-D.

A:

If 1 than 2

If 2 then 3

If 3 than 4

In this (A) situation after 1, 2 has to appear. Even when a robot performs Action 2 after (say) 6 rather than after the Action 1, it knows to proceed to Action 3. In B, if 2 appears, then 3 may not necessarily appear, rather, only if 1 and 2 appear in sequence will 3 follow.

B:

If 1 than 2

If 1 & 2 than 3

If 1 & 2 & 3 than 4

C:

If 1 then 2

If 2 then 3

If 3 then 4

End if

End if

End if

D:

If $x=1$ then 2

Else if $x < n$ then $x+1$

Else if $x=n$ end

In C and D situations, Action 3 must appear after Action 2 that follows Action 1. In Situation C for example, when the robot performs Action 2 after (say) Action 6 rather than after the first action, it does not know that it has to continue to Action 3. If the robot in situation D performs Action 6 and then 3, it will correctly infer Action 4. Yet even in such a case the robot does not seem able to reproduce the obtained behavioral results, as the overlapping segment is performed differently in the original and novel routes. The very same route sequence is performed differently by the cognitive system according to the route context it appears in.

One of the possibilities that arise from this study is that during training, there is a transition from declarative memory of separate connections between the locations from 1 to n, that is as in A, to procedural and automatic execution where Action 1 leads to Action 2 which leads to Action 3 which leads to 4 as in B, C and D. If one

preforms the route in an automatic manner as a unit, but at some point transfers to a different route that partly overlaps with the old route, performance must revert again to declarative memory of separate connections between the locations.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Figure1

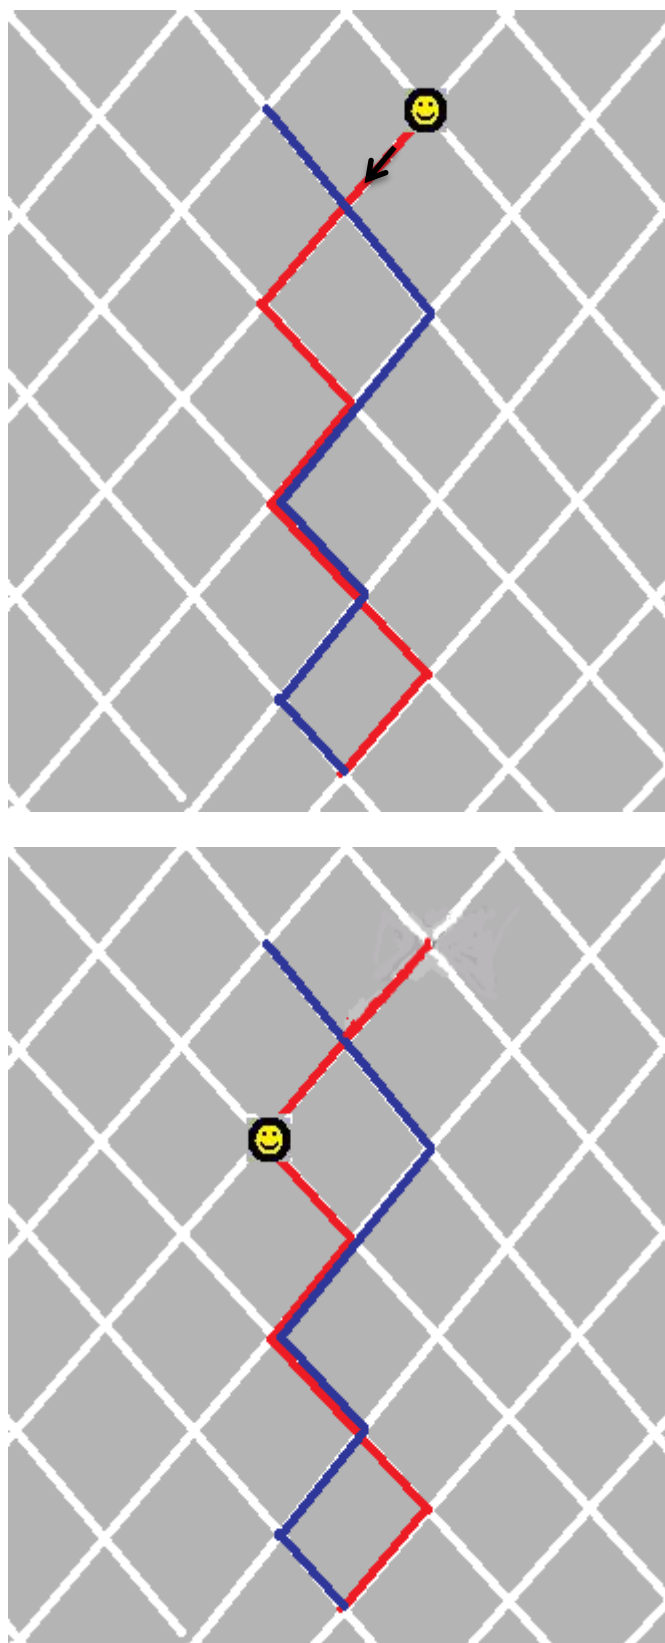


Figure 1

Figure2

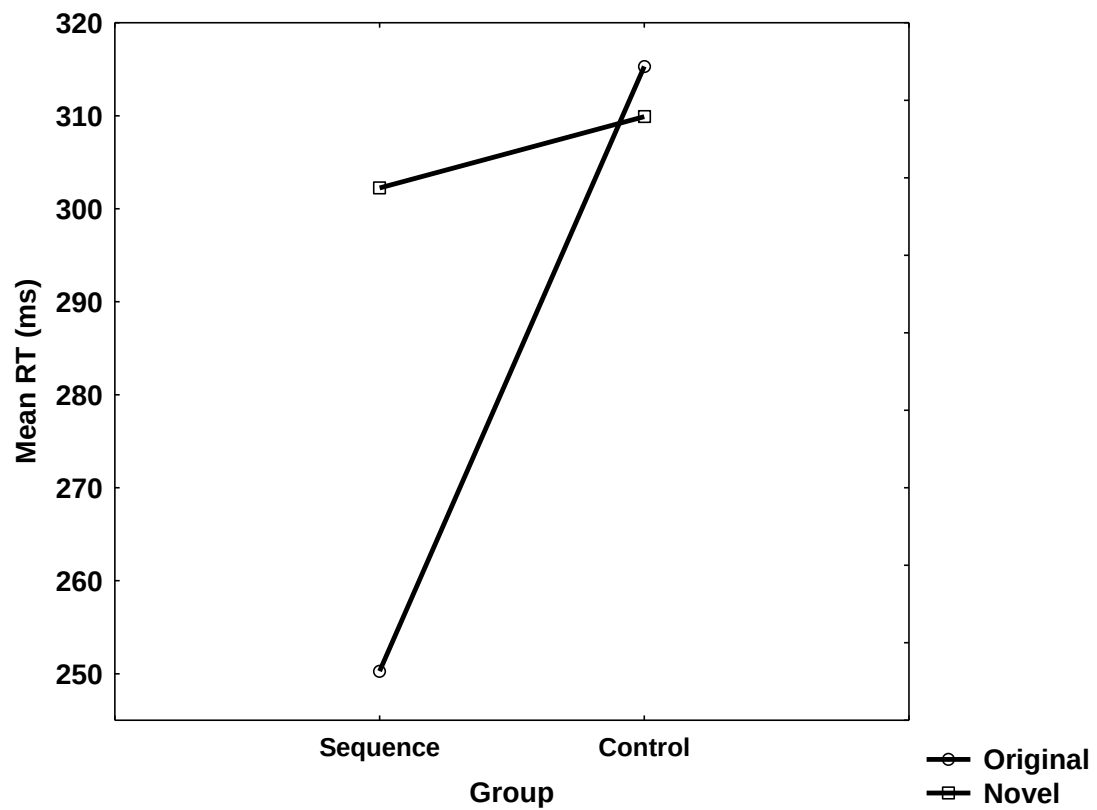


Figure3

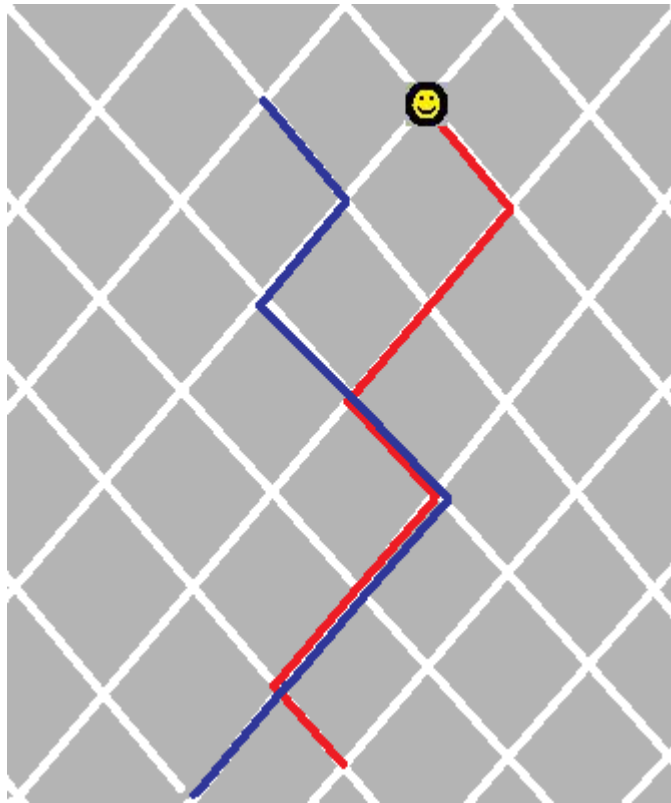


Figure 3

Figure4

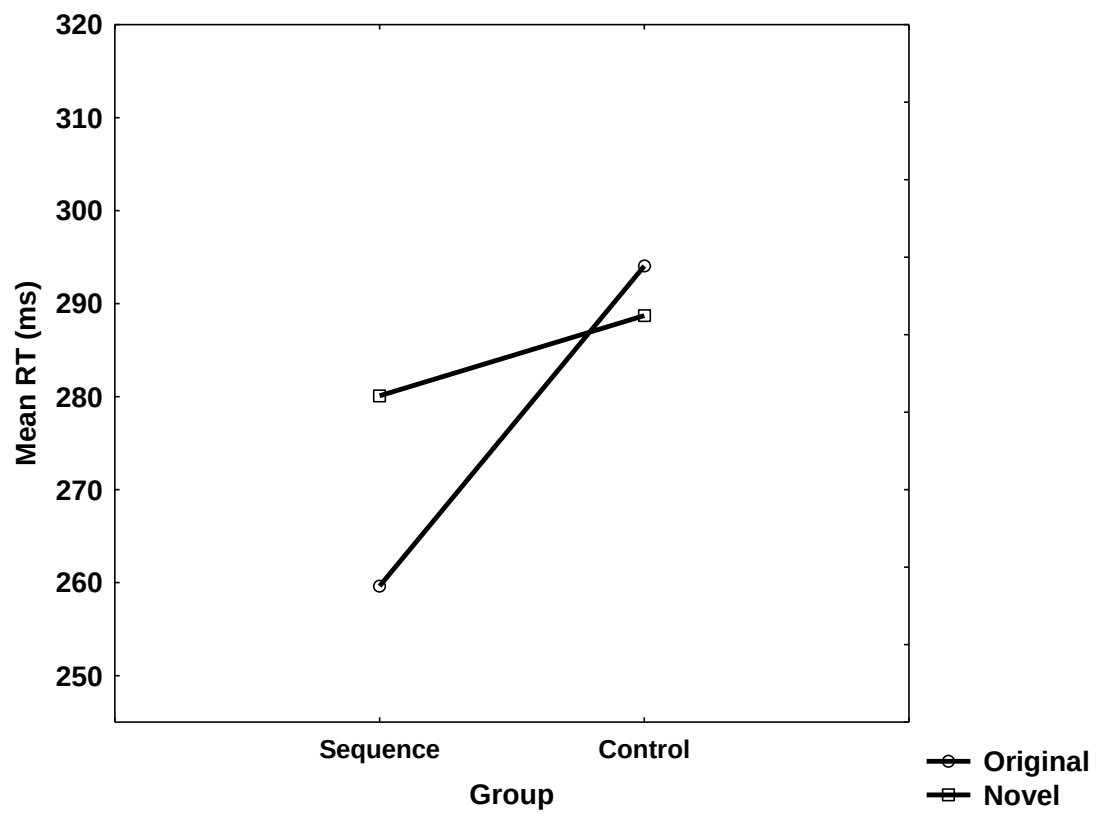


Figure5

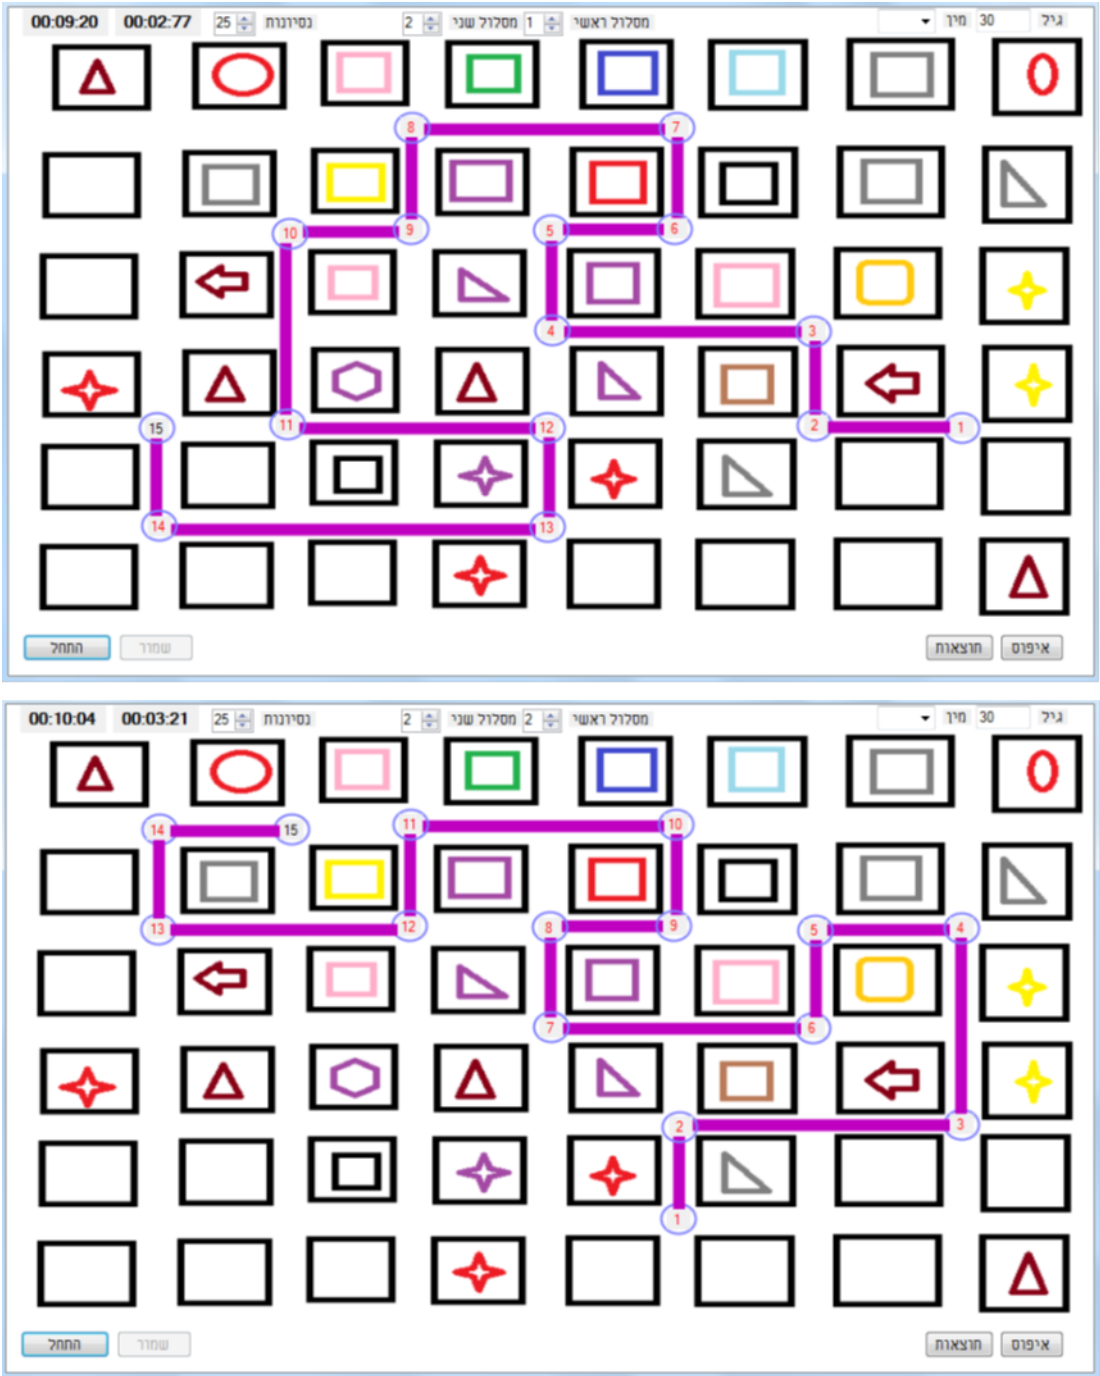


Figure 5

Figure6

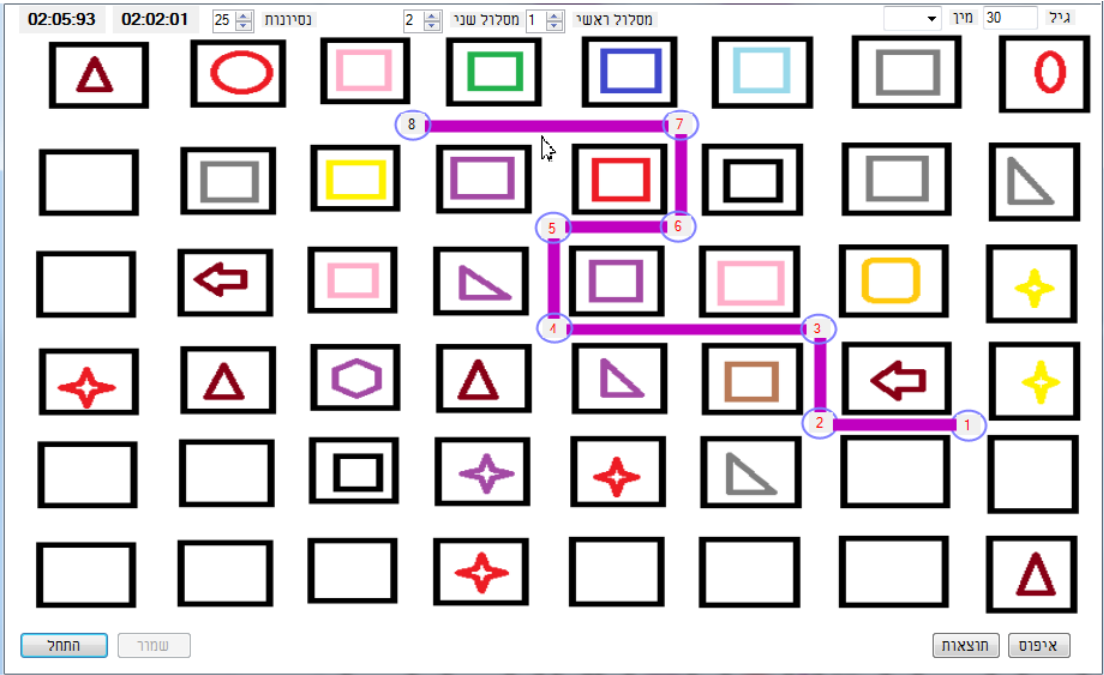


Figure 6

Figure7

